

**Proposed**

**Total Maximum Daily Loads**

**for**

**Dissolved Oxygen and Nutrients**

**Minnow Creek (Direct Runoff to Gulf)**

**Cedar Creek (Tidal)**

**WBIDs 1535 and 1556**

**June 2012**



## TABLE OF CONTENTS

<b>TABLE OF CONTENTS .....</b>	<b>I</b>
<b>LIST OF FIGURES .....</b>	<b>III</b>
<b>LIST OF TABLES .....</b>	<b>V</b>
<b>1.0 INTRODUCTION.....</b>	<b>1</b>
<b>2.0 PROBLEM DEFINITION .....</b>	<b>2</b>
<b>3.0 WATERSHED DESCRIPTION.....</b>	<b>3</b>
3.1 CLIMATE .....	3
3.2 HYDROLOGIC CHARACTERISTICS .....	3
3.3 LAND USE .....	4
<b>4. WATER QUALITY STANDARDS/TMDL TARGETS .....</b>	<b>9</b>
4.1. NUTRIENTS:.....	9
4.1.1 Narrative Nutrient Criteria.....	9
4.1.2 Florida's adopted numeric nutrient criteria for streams .....	10
4.2 DISSOLVED OXYGEN CRITERIA:.....	11
4.3 NATURAL CONDITIONS .....	11
4.4 BIOLOGICAL OXYGEN DEMAND CRITERIA:.....	12
<b>5.0 WATER QUALITY ASSESSMENT .....</b>	<b>12</b>
5.1 WATER QUALITY DATA .....	12
5.1.1 Dissolved Oxygen .....	12
5.1.2 Biological Oxygen Demand.....	12
5.1.3 Nutrients .....	12
5.1.3.1 Total Nitrogen .....	13
5.1.3.2 Total Phosphorus.....	13
5.1.3.3 Chlorophyll-a .....	13
<b>6.0 SOURCE AND LOAD ASSESSMENT .....</b>	<b>24</b>
6.1 POINT SOURCES .....	24
6.1.1 Wastewater/Industrial Permitted Facilities .....	24
6.1.2 Stormwater Permitted Facilities/MS4s .....	25
6.2 NONPOINT SOURCES .....	26
6.2.1 Urban Areas.....	27
6.2.2 Pastures .....	28
6.2.3 Clear cut/Sparse .....	28
6.2.4 Forests .....	28
6.2.5 Water and Wetlands.....	28

---

6.2.6	Quarries/Strip mines.....	29
<b>7.0</b>	<b>ANALYTICAL APPROACH.....</b>	<b>30</b>
7.1	MECHANISTIC MODELS.....	30
7.1.1	Loading Simulation Program C++ (LSPC).....	30
7.1.2	Environmental Fluids Dynamic Code (EFDC).....	31
7.1.3	Water Quality Analysis Simulation Program (WASP7).....	32
7.1.4	Coastal Pinellas County Mechanistic Model.....	32
7.2	SCENARIOS.....	33
7.2.1	Current Condition.....	34
7.2.2	Natural Condition.....	40
<b>8.0</b>	<b>TMDL DETERMINATION .....</b>	<b>45</b>
8.1	CRITICAL CONDITIONS AND SEASONAL VARIATION .....	47
8.2	MARGIN OF SAFETY .....	47
8.3	WASTE LOAD ALLOCATIONS .....	48
8.3.1	Wastewater/Industrial Permitted Facilities .....	48
8.3.2	Municipal Separate Storm Sewer System Permits .....	48
8.4	LOAD ALLOCATIONS.....	49
<b>9.0</b>	<b>RECOMMENDATIONS/IMPLEMENTATION .....</b>	<b>49</b>
<b>10.0</b>	<b>REFERENCES.....</b>	<b>50</b>

## LIST OF FIGURES

Figure 2.1	Location of impaired WBIDs in Coastal Pinellas County.....	2
Figure 3.1	Land use of impaired WBIDs in Coastal Pinellas County.....	5
Figure 3.2	Aerial photo illustrating contributing subwatershed boundaries and impaired WBIDs.	7
Figure 5.1	Water quality monitoring station locations for WBID 1535 and 1556.....	16
Figure 5.2	Dissolved oxygen concentrations for WBID 1535 .....	17
Figure 5.3	Biological oxygen demand concentrations for WBID 1535.....	18
Figure 5.4	Total Nitrogen concentrations for WBID 1535 .....	18
Figure 5.5	Total Phosphorus concentrations for WBID 1535.....	19
Figure 5.6	Total Phosphorus concentrations for WBID 1535.....	20
Figure 5.7	Dissolved oxygen concentrations for WBID 1556 .....	20
Figure 5.8	Biological oxygen demand concentrations for WBID 1556.....	21
Figure 5.9	Total Nitrogen concentrations for WBID 1556 .....	22
Figure 5.10	Total Phosphorus concentrations for WBID 1556.....	22
Figure 5.11	Chlorophyll a corrected concentrations for WBID 1556.....	23
Figure 6.1	Permitted facilities in the impaired WBIDs in Coastal Pinellas County. ....	25
Figure 7.1	LSPC subwatershed boundaries and WASP model grid for WBIDs 1535 and 1556	33
Figure 7.2	Simulated temperature (°C) verse measured temperature in WBID 1535 at station 21FLTPA 28033158246322 .....	34
Figure 7.3	Simulated temperature (°C) verse measured temperature in WBID 1556 at station 21FLPDEM09-03 .....	35
Figure 7.4	Simulated dissolved oxygen (mg/L) verse measured dissolved oxygen in WBID 1535 at station 21FLTPA 28033158246322.....	36
Figure 7.5	Simulated dissolved oxygen (mg/L) verse measured dissolved oxygen in WBID 1556 at station 21FLPDEM09-03.....	36
Figure 7.6	Simulated total nitrogen (mg/L) verse measured total nitrogen in WBID 1535 at station 21FLTPA 28033158246322.....	37
Figure 7.7	Simulated total nitrogen (mg/L) verse measured total nitrogen in WBID 1556 at station 21FLPDEM09-03.....	38
Figure 7.8	Simulated total phosphorus (mg/L) verse measured total phosphorus in WBID 1535 at station 21FLTPA 28033158246322.....	38

Figure 7.9 Simulated total phosphorus (mg/L) verse measured total phosphorus in WBID 1556 at station 21FLPDEM09-03 ..... 39

Figure 7.10 Natural condition scenario temperature (°C) in WBID 1535 ..... 40

Figure 7.11 Natural condition scenario temperature (°C) in WBID 1556 ..... 41

Figure 7.12 Natural condition scenario dissolved oxygen (mg/L) in WBID 1535 ..... 41

Figure 7.13 Natural condition scenario dissolved oxygen (mg/L) in WBID 1556 ..... 42

---

## LIST OF TABLES

Table 2.1	Impaired WBIDs in Coastal Pinellas.....	3
Table 3.1	Land use distribution for the impaired WBIDs in Coastal Pinellas County.....	6
Table 3.2	Land use distribution for the contributing subwatersheds in Coastal Pinellas County8	
Table 5.1	Water quality data for impaired WBIDs in Coastal Pinellas County.....	13
Table 5.2	Water quality data for impaired WBIDs in Coastal Pinellas County.....	15
Table 6.1	Permitted Facilities by WBID.....	25
Table 6.2	MS4 Permits by WBID.....	26
Table 6.3	County estimates of septic tanks and repair permits in Pinellas County, Florida.....	28
Table 7.1	Current condition concentrations in WBIDs 1535 and 1556.....	39
Table 7.2	Current condition loadings in WBIDs 1535 and 1556.....	39
Table 7.3	Natural condition concentrations in WBIDs 1535 and 1556.....	45
Table 7.4	Natural condition loadings in WBIDs 1535 and 1556.....	45
Table 8.1	TMDL load allocations for WBID 1535.....	46
Table 8.2	TMDL load allocations for WBID 1556.....	47

**SUMMARY SHEET for WBID 1535**  
**Total Maximum Daily Load (TMDL)**

**2006 303(d) Listed Waterbodies for TMDLs addressed in this report:**

WBID	Segment Name	Class and Waterbody Type	Major River Basin	HUC	County	State
1535	Minnow Creek (Direct Runoff to Gulf)	Class III Marine	Anclote River/Coastal Pinellas County	3100207	Pinellas	Florida

**TMDL Endpoints/Targets:**

Dissolved Oxygen and Nutrients

**TMDL Technical Approach:**

The TMDL allocations were determined by analyzing the effects of TN, TP, and BOD concentrations and loadings on DO concentrations in the waterbody. A watershed model and estuary model were used to predict delivery of pollutant loads to the waterbody and to evaluate the in-stream impacts of the pollutant loads.

**TMDL Waste Load and Load Allocation**

Constituent	Current Condition WLA (kg/yr)	Current Condition LA (kg/yr)	TMDL Condition WLA (kg/yr)	TMDL Condition LA (kg/yr)	Percent reduction WLA	Percent Reduction LA
Total Nitrogen	--	1,090	--	199	--	82%
Total Phosphorus	--	139	--	19	--	87%
Biological Oxygen Demand	--	3,158	--	1,271	--	60%

**Endangered Species Present (Yes or Blank):** Yes

**USEPA Lead TMDL (USEPA or Blank):** USEPA

**TMDL Considers Point Source, Non-point Source, or Both:** Both

**Major NPDES Discharges to surface waters addressed in USEPA TMDL:** None

**SUMMARY SHEET for WBID 1556**  
**Total Maximum Daily Load (TMDL)**

**2006 303(d) Listed Waterbodies for TMDLs addressed in this report:**

WBID	Segment Name	Class and Waterbody Type	Major River Basin	HUC	County	State
1556	Cedar Creek (Tidal)	Class III Marine	Anclote River/Coastal Pinellas County	3100207	Pinellas	Florida

**TMDL Endpoints/Targets:**

Dissolved Oxygen and Nutrients

**TMDL Technical Approach:**

The TMDL allocations were determined by analyzing the effects of TN, TP, and BOD concentrations and loadings on DO concentrations in the waterbody. A watershed model and estuary model were used to predict delivery of pollutant loads to the waterbody and to evaluate the in-stream impacts of the pollutant loads.

**TMDL Waste Load and Load Allocation**

Constituent	Current Condition WLA (kg/yr)	Current Condition LA (kg/yr)	TMDL Condition WLA (kg/yr)	TMDL Condition LA (kg/yr)	Percent reduction WLA	Percent Reduction LA
Total Nitrogen	--	3,056	--	568	--	81%
Total Phosphorus	--	389	--	54	--	86%
Biological Oxygen Demand	--	8,360	--	3,529	--	58%

**Endangered Species Present (Yes or Blank):** Yes

**USEPA Lead TMDL (USEPA or Blank):** USEPA

**TMDL Considers Point Source, Non-point Source, or Both:** Both

**Major NPDES Discharges to surface waters addressed in USEPA TMDL:** None

## 1.0 INTRODUCTION

Section 303(d) of the Clean Water Act requires each state to list those waters within its boundaries for which technology based effluent limitations are not stringent enough to protect any water quality standard applicable to such waters. Listed waters are prioritized with respect to designated use classifications and the severity of pollution. In accordance with this prioritization, states are required to develop Total Maximum Daily Loads (TMDLs) for those water bodies that are not meeting water quality standards. The TMDL process establishes the allowable loadings of pollutants or other quantifiable parameters for a waterbody based on the relationship between pollution sources and in-stream water quality conditions, so that states can establish water quality based controls to reduce pollution from both point and nonpoint sources and restore and maintain the quality of their water resources (USEPA 1991).

The Florida Department of Environmental Protection (FDEP) developed a statewide, watershed-based approach to water resource management. Under the watershed management approach, water resources are managed on the basis of natural boundaries, such as river basins, rather than political boundaries. The watershed management approach is the framework FDEP uses for implementing TMDLs. The state's 52 basins are divided into five groups and water quality is assessed in each group on a rotating five-year cycle. FDEP also established five water management districts (WMD) responsible for managing ground and surface water supplies in the counties encompassing the districts. All of the waterbodies addressed in this TMDL are located in the Springs Coast Basin and are Group 5 waterbodies managed by the Southwest Florida Water Management District (SWFWMD).

For the purpose of planning and management, the WMDs divided the district into planning units defined as either an individual primary tributary basin or a group of adjacent primary tributary basins with similar characteristics. These planning units contain smaller, hydrological based units called drainage basins, which are further divided by FDEP into "water segments". A water segment usually contains only one unique waterbody type (stream, lake, canal, etc.) and is about 5 square miles. Unique numbers or waterbody identification (WBIDs) numbers are assigned to each water segment. The WBIDs in this TMDL are located in the Anclote River/Coastal Pinellas County Planning Unit. WBIDs 1535 and 1556 are impaired for dissolved oxygen and nutrients.

## 2.0 PROBLEM DEFINITION

To determine the status of surface water quality in Florida, three categories of data – chemistry data, biological data, and fish consumption advisories – were evaluated to determine potential impairments. The level of impairment is defined in the Identification of Impaired Waters Rule (IWR), Section 62-303 of the Florida Administrative Code (FAC). The IWR is FDEP’s methodology for determining whether waters should be included on the state’s planning list and verified list. Potential impairments are determined by assessing whether a waterbody meets the criteria for inclusion on the planning list. Once a waterbody is on the planning list, additional data and information will be collected and examined to determine if the water should be included on the verified list.

The TMDLs addressed in this document are being established pursuant to commitments made by the United States Environmental Protection Agency (USEPA) in the 1998 Consent Decree in the Florida TMDL lawsuit (Florida Wildlife Federation, et al. v. Carol Browner, et al., Civil Action No. 4: 98CV356-WS, 1998). That Consent Decree established a schedule for TMDL development for waters listed on Florida’s USEPA approved 1998 section 303(d) list. The 2006 section 303(d) list identified numerous WBIDs in the Springs Coast Basin as not meeting water quality standards. After assessing all readily available water quality data, USEPA is responsible for developing a TMDL for all WBIDs depicted in Figure 2.1. The parameters addressed for each WBID are listed on Table 2.1.

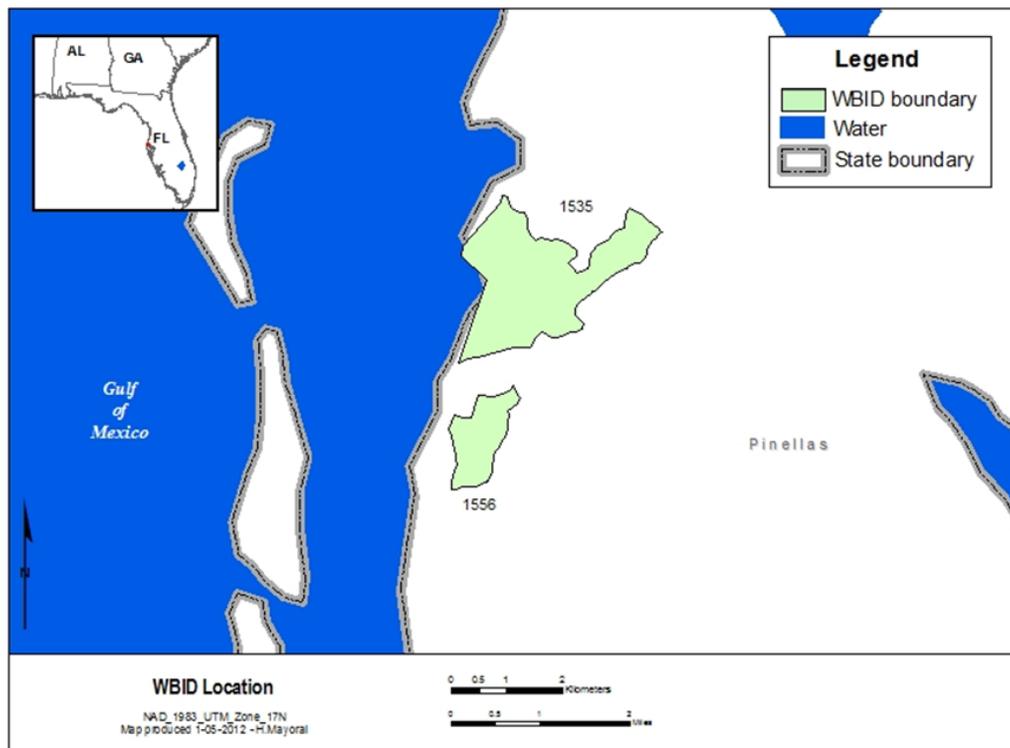


Figure 2.1 Location of impaired WBIDs in Coastal Pinellas County.

Table 2.1 Impaired WBIDs in Coastal Pinellas.

WBID	Segment Name	Class	Impaired Parameters	Planning Unit
1535	Minnow Creek (Direct Runoff to Gulf)	3M	DO & Nutrients	Anclote River/Coastal Pinellas County
1556	Cedar Creek (Tidal)	3M	DO & Nutrients	Anclote River/Coastal Pinellas County

### 3.0 WATERSHED DESCRIPTION

The Springs Coast Basin is located along the west coast, beginning just south of the Withlacoochee River in Citrus County and extends to Gulfport, Florida in Pinellas County, although it does not include Tampa Bay. Within the watershed lies six major rivers, Crystal River, Homosassa River, Chassahowitza River, Weeki Wachee, the Anclote River, and the Pithlachascotee River; along with numerous springs and lakes (FDEP). The Brooksville Ridge marks the eastern boundary, created by sands historically deposited during higher sea-levels, and which define the karst geology that is characteristic of the area (FDEP 2008).

Three physiographic regions with varying geology and topography are located within the Springs Coast Basin, the Coastal Swamps, the Gulf Coastal Lowlands, and the Brooksville Ridge. Coastal Pinellas County is located in the southwestern portion of the Springs Coast Basin in the Coastal Swamps region and the Gulf Coastal Lowlands (SWFWMD 2001). The Coastal Swamp region is characterized by poorly drained shallow soils that overlay the limestone of the Floridan aquifer. The Gulf Coast Lowlands are characterized by flat river valleys and rolling hills formed by aeolian deposited sands. Much of the Gulf Coastal Lowlands, including regions along the U.S. Highway 19 corridor, have been and continue to be intensively developed, although large sections of federally owned tracts of wetlands and swamps have been preserved (FDEP). The southwest region of the Springs Coast has a fewer springs than the northern region, and the springs have relatively low flow volumes (FDEP 2008).

#### 3.1 Climate

The Springs Coast Basin is located in Central Florida and experiences a humid subtropical climate with distinct wet (May to October) and dry (November to April) seasons, high rates of evapotranspiration, and climatic extremes of floods, droughts, and hurricanes. Seasonal rainfall patterns resemble the wet and dry season patterns of humid tropics. Central Florida receives an average of 46 inches of rain every year, of which 75% falls during the wet season, which coincides with hurricane season (USACE and SFWMD 2010). Average temperatures during the wet season are in the low-80s (°F) and in the dry season are in the mid-60s (°F) (NOAA).

#### 3.2 Hydrologic characteristics

The contributing drainage areas to WBIDs 1535 and 1556 are small, and approximately 981 acres and 1536 acres respectively. Both WBIDs drain west, eventually into the Gulf of Mexico,

although WBID 1535, Minnow Creek and direct runoff, enter St. Joseph Sound first, while WBID 1556, Cedar Creek, enters Clearwater Harbor first. Both St. Joseph Sounds and Clearwater Harbor are relatively shallow, with average depths less than 5 feet (Janicki Environmental Inc 2009). Both watersheds have low relief, with elevations ranging from 0 meters mean sea level (msl) to 1.5 meter msl. Most of soils in the watershed have deep, well drained sandy soils, although the riparian area of Cedar Creek is classified as having undrained soils with coarse textures. The watersheds are highly developed and much of the contributing area is impervious, preventing infiltration of water into the soils during storm events.

### **3.3 Land Use**

Overall, WBIDs 1535 and 1556 are highly developed (Figure 3.1). Approximately 78 percent of WBID 1535 and 74 percent of WBID 1556 are developed, both of which have greater than 60 percent high intensity development. After developed land use, open water accounts for 15 percent of land use in WBID 1535, while forest and wetlands comprise 3 percent and 4 percent, respectively. In WBID 1556, wetlands account for 13 percent of the land use, followed by forest at 8 percent, with golf courses comprising 2 percent of the land use.

The actual drainage area of the watersheds varies from the WBID boundaries (Figure 3.2). The United States Geological Survey National Hydrography Dataset was used to delineate the drainage area. The land use composition for the drainage area of WBID 1535 was comprised of developed, open water, and wetlands land uses (Table 3.2). Of the developed land use, over half was high-intensity developed land. The drainage area for WBID 1556 is nearly five times larger than the WBID boundary and consists of 85 percent developed land use, of which over half is high-intensity development.

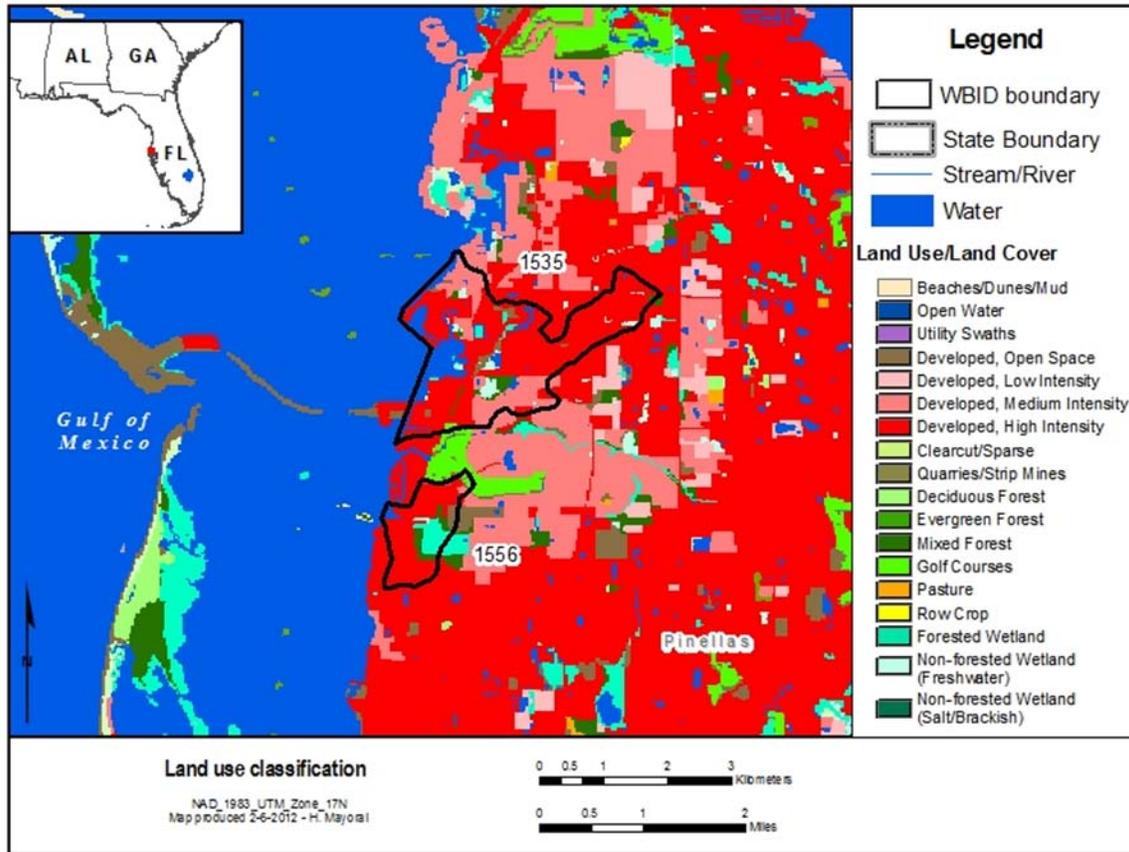


Figure 3.1 Land use of impaired WBIDs in Coastal Pinellas County.

Table 3.1 Land use distribution for the impaired WBIDs in Coastal Pinellas County.

Land Use Classification	1535		1556	
	Acres	%	Acres	%
Beaches/Dunes/Mud	1	0%	0	0%
Evergreen Forest	0	0%	0	0%
Deciduous Forest	0	0%	0	0%
Mixed Forest	32	3%	25	8%
Forested Wetland	14	1%	38	12%
Non-Forested Wetland (Freshwater)	35	3%	4	1%
Open Water	193	15%	11	3%
Pasture	0	0%	0	0%
Row Crop	0	0%	0	0%
Golf Courses	4	0%	6	2%
Clear cut Sparse	0	0%	0	0%
Quarries Strip mines	0	0%	0	0%
Developed, Open Space	31	3%	16	5%
Developed, Low intensity	0	0%	0	0%
Developed, Medium intensity	185	15%	3	1%
Developed, High intensity	750	60%	216	68%
<b>Totals</b>	<b>1,244</b>	<b>100%</b>	<b>319</b>	<b>100%</b>

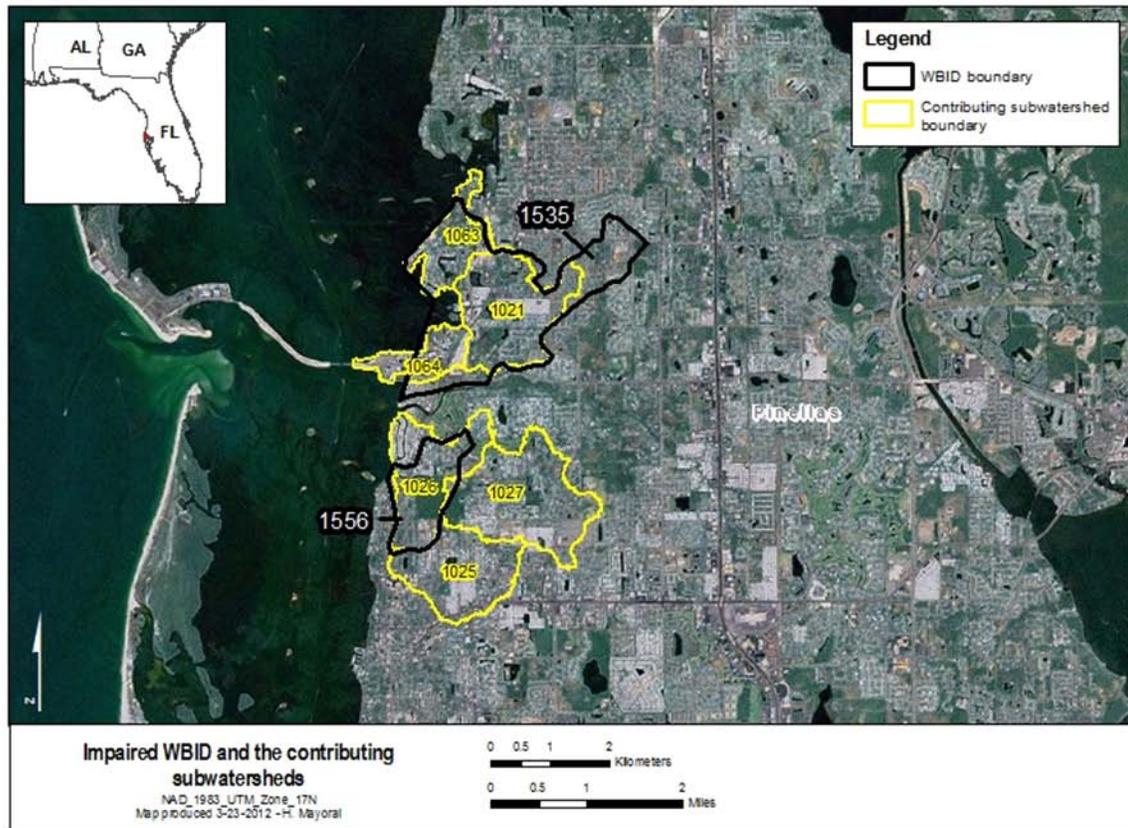


Figure 3.2 Aerial photo illustrating contributing subwatershed boundaries and impaired WBIDs.

Table 3.2 Land use distribution for the contributing subwatersheds in Coastal Pinellas County

Land Use Classification	Contributing subwatersheds for WBID 1535		Contributing subwatersheds for WBID 1556	
	Acres	%	Acres	%
Beaches/Dunes/Mud	1	0%	0	0%
Evergreen Forest	0	0%	0	0%
Deciduous Forest	0	0%	4	0%
Mixed Forest	29	3%	59	4%
Forested Wetland	15	2%	68	4%
Non-Forested Wetland (Freshwater)	28	3%	4	0%
Open Water	133	14%	45	3%
Pasture	0	0%	0	0%
Row Crop	0	0%	0	0%
Golf Courses	0	0%	55	4%
Clear cut Sparse	0	0%	0	0%
Quarries Strip mines	0	0%	0	0%
Developed, Open Space	44	4%	84	5%
Developed, Low intensity	0	0%	0	0%
Developed, Medium intensity	187	19%	363	24%
Developed, High intensity	545	56%	854	56%
<b>Totals</b>	<b>981</b>	<b>100%</b>	<b>1,535</b>	<b>100%</b>

## 4. WATER QUALITY STANDARDS/TMDL TARGETS

The waterbodies in the Coastal Pinellas County WBID are Class III Freshwater with a designated use of Recreation, Propagation and Maintenance of a Healthy, Well-Balanced Population of Fish and Wildlife. Designated use classifications are described in Florida's water quality standards. See Section 62-302.400, F.A.C. Water quality criteria for protection of all classes of waters are established in Section 62-302.530, F.A.C. Individual criteria should be considered in conjunction with other provisions in water quality standards, including Section 62-302.500 F.A.C., which established minimum criteria that apply to all waters unless alternative criteria are specified. Section 62-302.530, F.A.C. Several of the WBIDs addressed in this report were listed due to elevated concentrations of chlorophyll *a*. While FDEP does not have a streams water quality standard specifically for chlorophyll *a*, elevated levels of chlorophyll *a* are frequently associated with a violation of the narrative nutrient standard, which is described below.

### 4.1. *Nutrients:*

The designated use of Class III waters is recreation, propagation and maintenance of a healthy, well-balanced population of fish and wildlife. In 1979, FDEP adopted a narrative criterion for nutrients. FDEP recently adopted numeric nutrient criteria for many Class III waters in the state, including streams, which numerically interprets part of the state narrative criterion for nutrients. While those criteria have been submitted to EPA for review pursuant to section 303(c) of the CWA, EPA has not completed that review. Therefore, for streams in Florida, the applicable nutrient water quality standard for CWA purposes remains the Class III narrative criterion.

As set out more fully below, should any new or revised state criteria for nutrients in streams in Florida become applicable for CWA purposes before this proposed TMDL is established, EPA will consider the impact of such criteria on the target selected for this TMDL.

Also, in November 2010, EPA promulgated numeric nutrient criteria for Class III inland waters in Florida, including streams. On February 18, 2012, the streams criteria were invalidated by the U.S. District Court for the Northern District of Florida and remanded back to EPA. Should a federally promulgated criterion become effective for CWA purposes before this proposed TMDL is established, EPA will consider the impact of such criteria on the target selected for this TMDL.

#### 4.1.1 Narrative Nutrient Criteria

Florida's narrative nutrient criteria provides:

The discharge of nutrients shall continue to be limited as needed to prevent violations of other standards contained in this chapter. Man induced nutrient enrichment (total nitrogen and total phosphorus) shall be considered degradation in relation to the provisions of Sections 62-302.300, 62-302.700, and 62-4.242. Section 62-302.530(48)(a), F.A.C.

In no case shall nutrient concentrations of a body of water be altered so as to cause an imbalance in natural populations of aquatic flora or fauna. Section 62-302.530(48)(b), F.A.C.

Chlorophyll and dissolved oxygen (DO) levels are often used to indicate whether nutrients are present in excessive amounts. The target for this TMDL is based on levels of nutrients necessary to prevent violations of Florida's DO criterion, set out below.

#### 4.1.2 Florida's adopted numeric nutrient criteria for streams

Florida's recently adopted numeric nutrient criteria interprets the narrative water quality criterion for nutrients in paragraph 62-302.530(48)(b), F.A.C. See section 62-302.531(2). The Florida rule provides that the narrative water quality criteria for nutrients in paragraph 62-302.530(47)(a), F.A.C., continues to apply to all Class III waters. See section 62-302.531(1).

Florida's recently adopted rule applies to streams, including (WBID in TMDL). For streams that do not have a site specific criteria, Florida's rule provides for biological information to be considered together with nutrient thresholds to determine whether a waterbody is attaining 62-302.531(2)(c), F.A.C. The rule provides that the nutrient criteria are attained in a stream segment where information on chlorophyll a levels, algal mats or blooms, nuisance macrophyte growth, and changes in algal species composition indicates there are no imbalances in flora and either the average score of at least two temporally independent SCIs performed at representative locations and times is 40 or higher, with neither of the two most recent SCI scores less than 35, or the nutrient thresholds set forth in table [##] below are achieved. See section 62-302.531(2)(c).

Florida's rule provides that numeric nutrient criteria are expressed as a geometric mean, and concentrations are not to be exceeded more than once in any three calendar year period. Section 62-302.200 (25)(e), F.A.C.

Should FDEP's numeric nutrient criteria for streams become an applicable water quality standard for CWA purposes before this TMDL is established, EPA will consider the nutrient target necessary to attain section 62-302.531(2)(c), F.A.C. EPA will compare that target with the target necessary to attain paragraph 62-302.530(47)(a), F.A.C., to determine which target is more stringent.

Table 4.1 Inland numeric nutrient criteria

Nutrient Watershed Region	Total Phosphorus Nutrient Threshold	Total Nitrogen Nutrient Threshold
Panhandle West	0.06 mg/L	0.67 mg/L
Panhandle East	0.18 mg/L	1.03 mg/L
North Central	0.30 mg/L	1.87 mg/L

Peninsular	0.12 mg/L	1.54 mg/L
West Central	0.49 mg/L	1.65 mg/L
South Florida	No numeric nutrient threshold. The narrative criterion in paragraph 62-302.530(47)(b), F.A.C., applies.	No numeric nutrient threshold. The narrative criterion in paragraph 62-302.530(47)(b), F.A.C., applies.

#### **4.2 Dissolved Oxygen Criteria:**

Numeric criteria for DO are expressed in terms of minimum and daily average concentrations.

##### ***The water quality criterion for Class III freshwaters is as follows:***

Shall not be less than 5.0 mg/L. Normal daily and seasonal fluctuations above these levels shall be maintained. [FAC 62-302.530 (30)]

##### ***The water quality criterion for Class III marine waters is as follows:***

Shall not average less than 5.0 mg/L in a 24-hour period and shall never be less than 4.0 mg/L. Normal daily and seasonal fluctuations above these levels shall be maintained. [FAC 62-302.530 (30)]

#### **4.3 Natural Conditions**

In addition to the standards for nutrients, DO, and BOD described above, Florida's standards include provisions that address waterbodies which do not meet the standards due to natural background conditions.

Florida's water quality standards provide a definition of natural background:

"Natural Background" shall mean the condition of waters in the absence of man-induced alterations based on the best scientific information available to the Department. The establishment of natural background for an altered waterbody may be based upon a similar unaltered waterbody or on historical pre-alteration data. [FAC 62-302.200 (19)]

Florida's water quality standards also provide that:

Pollution which causes or contributes to new violations of water quality standards or to continuation of existing violations is harmful to the waters of this State and shall not be allowed. Waters having water quality below the criteria established for them shall be protected and enhanced. However, the Department shall not strive to abate natural conditions. [FAC 62-302.300 (15)]

#### **4.4 Biological Oxygen Demand Criteria:**

Biochemical Oxygen Demand (BOD) shall not be increased to exceed values which would cause dissolved oxygen to be depressed below the limit established for each class and, in no case, shall it be great enough to produce nuisance conditions. [FAC 62-302.530 (11)]

### **5.0 WATER QUALITY ASSESSMENT**

The WBIDs addressed in this report were listed as not attaining their designated use on Florida's 2006 303(d) list for DO and nutrients (WBIDs 1535 & 1556). To determine impairment, an assessment of available data was conducted. The source for current ambient monitoring data was the Impaired Waters Rule (IWR) data Run 44, using data collected in January 1, 2002 to December 31, 2010. The IWR database contains data from various sources within the state of Florida, including the WMDs and counties.

#### **5.1 Water Quality Data**

Table 5.1 lists the water quality stations found in the four WBIDs, and Table 5.2 provides an analysis of the water quality data. Figure 5.1 illustrates where the water quality monitoring stations are located within each of the WBIDs. Figures 5.2-5.11 display water quality data for each WBID.

##### **5.1.1 Dissolved Oxygen**

There are several factors that affect the concentration of dissolved oxygen (DO) in a waterbody. Oxygen can be introduced by wind, diffusion, photosynthesis, and additions of higher DO water (e.g. from tributaries). DO concentrations are lowered by processes that use up oxygen from the water, such as respiration and decomposition, and by additions of water with lower DO (e.g. swamp or groundwater). Natural DO levels are a function of water temperature, water depth and velocity, and relative contributions of groundwater. Decomposition of organic matter, such as dead plants and animals, also consume DO. Dissolved oxygen minimum concentrations were below 2 mg/L in all WBIDs. Mean DO concentrations in the WBIDs ranged from 4.36 mg/L and 4.80 mg/L.

##### **5.1.2 Biological Oxygen Demand**

BOD is a measure of the amount of oxygen used by bacteria as they stabilize organic matter. The process can be accelerated when there is an overabundance of nutrients, increasing the aerobic bacterial activity in a waterbody. In turn, the levels of DO can become depleted, eliminating oxygen essential for biotic survival, and potentially causing extensive fish kills. Additionally, BOD is used as an indicator to determine the presence and magnitude of organic pollution from sources such as septic tank leakage, fertilizer runoff, and wastewater effluent. Maximum BOD measurements ranged between 7.0 mg/L and 19.0 mg/L. Mean BOD measurements ranged from 1.88 mg/L to 5.80 mg/L in the impaired WBIDs.

##### **5.1.3 Nutrients**

Excessive nutrients in a waterbody can lead to overgrowth of algae and other aquatic plants such as phytoplankton, periphyton and macrophytes. This process can deplete oxygen in the water,

adversely affecting aquatic life and potentially restricting recreational uses such as fishing and boating. For the nutrient assessment the monitoring data for total nitrogen, total phosphorus and chlorophyll a are presented. The purpose of the nutrient assessment is to present the range, variability and average conditions for the WBID.

#### **5.1.3.1 Total Nitrogen**

Total Nitrogen (TN) is comprised of nitrate (NO<sub>3</sub>), nitrite (NO<sub>2</sub>), organic nitrogen and ammonia nitrogen (NH<sub>4</sub>). Although nitrogen is a necessary nutrient required for the growth of most plants and animals, not all forms are readily used or metabolized. Increased levels of organic nitrogen can be caused from the decomposition of detritus and sewage, while increased levels in inorganic nitrogen can be caused by erosion and fertilizers. Nitrates, which naturally occur in the soil, are components of industrial fertilizers, and are converted to nitrite by microorganisms in the environment. Surface runoff from agricultural lands can increase the natural presence of nitrates in the environment and can lead to eutrophication. Total nitrogen minimum concentrations measured approximately 0.50 mg/L for both WBIDs, and maximum concentrations measured between 1.68 mg/L and 2.30 mg/L. Total nitrogen means were 0.94 mg/L and 1.11 mg/L.

#### **5.1.3.2 Total Phosphorus**

In natural waters, total phosphorus exists in either soluble or particulate forms. Dissolved phosphorus includes inorganic and organic forms, while particulate phosphorus is made up of living and dead plankton, and its adsorbed, amorphous, and precipitated forms. Inorganic forms of phosphorus include orthophosphate and polyphosphates, although polyphosphates are unstable and convert to orthophosphate over time. Orthophosphate is both stable and reactive, making it the form most used by plants. Excessive phosphorus can lead to overgrowth of algae and aquatic plants, the decomposition of which consumes oxygen in the water. Total phosphorus minimum concentrations ranged between 0.02 mg/L and 0.05 mg/L, and maximum concentrations ranged between 0.14 and 0.28 mg/L. The mean concentrations in the WBIDs ranged from 0.07 to 0.15 mg/L.

#### **5.1.3.3 Chlorophyll-a**

Chlorophyll is the green pigment in plants that allows them to create energy from light. In a water sample, chlorophyll is indicative of the presence of algae, and chlorophyll-a is a measure of the active portion of total chlorophyll. Corrected chlorophyll refers to chlorophyll-a measurements that are corrected for the presence of pheophytin, a natural degradation product of chlorophyll that can interfere with analysis because it has an absorption peak in the same spectral region. It is used as a proxy indicator of water quality because of its predictable response to nutrient availability. Increases in nutrients can potentially lead to blooms in phytoplankton biomass, affecting water quality and ecosystem health. Corrected chlorophyll-a maximum measurements ranged between 27.0 µg/L and 118.0 µg/L, with means ranging between 6.31 µg/L and 11.11 µg/L in the impaired WBIDs.

Table 5.1 Water quality data for impaired WBIDs in Coastal Pinellas County.

WBID	Station Number
1535	21FLPDEM08-01

	21FLPDEMW1-A-09-07
	21FLPDEMW1-B-08-07
	21FLPDEMW1-C-10-07
	21FLTPA 28033158246322
	21FLTPA 28033238246245
<b>1556</b>	21FLPDEM09-01
	21FLPDEM09-02
	21FLTPA 28020228246470
	21FLTPA 28020278246543
	21FLTPA 28020818246562
	21FLTPA 28020928247076

Table 5.2 Water quality data for impaired WBIDs in Coastal Pinellas County.

Parameter	Stats	WBID	
		1535	1556
BOD, 5 Day, 20°C (mg/L)	# of obs	18	10
	min	0.96	1.00
	max	7.00	19.00
	mean	1.88	5.80
	Geomean	1.60	4.06
DO, Analysis by Probe (mg/L)	# of obs	67	77
	min	1.53	0.77
	max	13.28	9.02
	mean	4.80	4.36
	Geomean	4.32	3.73
Nitrogen, Total (mg/L as N)	# of obs	47	55
	min	0.52	0.53
	max	1.68	2.30
	mean	0.94	1.11
	Geomean	0.91	1.06
Phosphorus, Total (mg/L as P)	# of obs	42	56
	min	0.02	0.05
	max	0.14	0.28
	mean	0.07	0.15
	Geomean	0.07	0.14
Chlorophyll-a corrected (µg/L)	# of obs	43	56
	min	1.00	1.00

	max	27.00	118.00
	mean	6.31	11.11
	Geomean	3.87	4.29

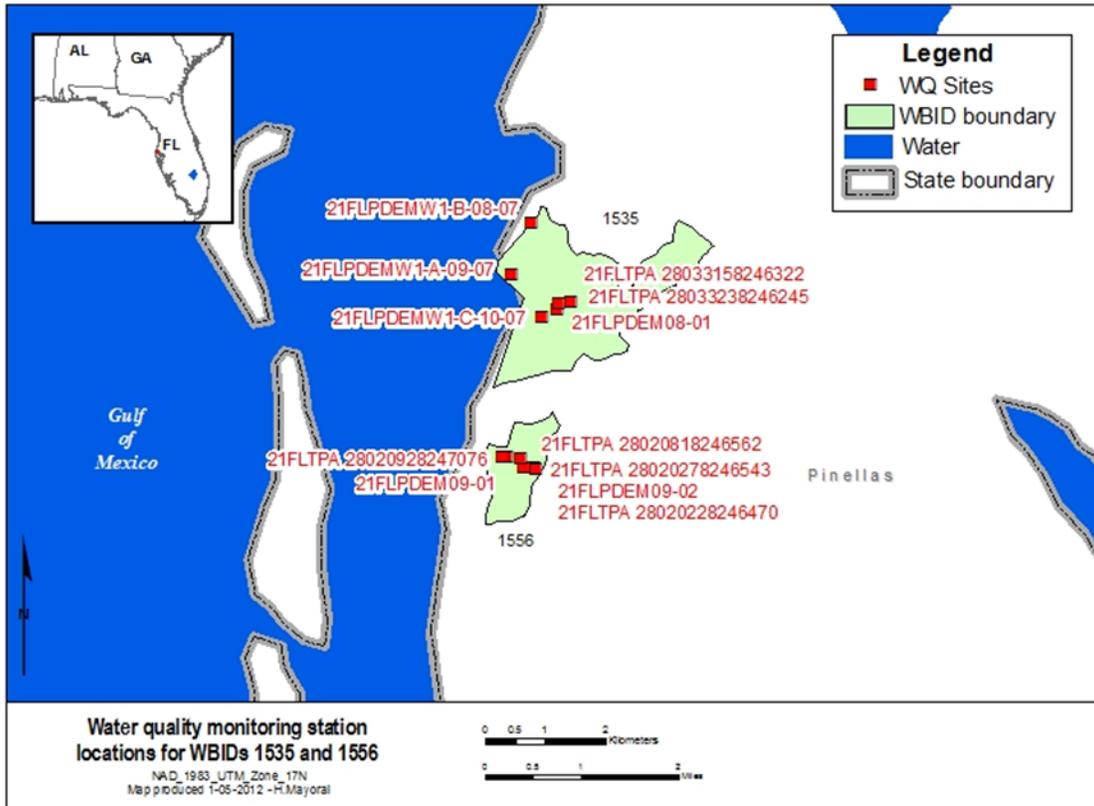


Figure 5.1 Water quality monitoring station locations for WBID 1535 and 1556

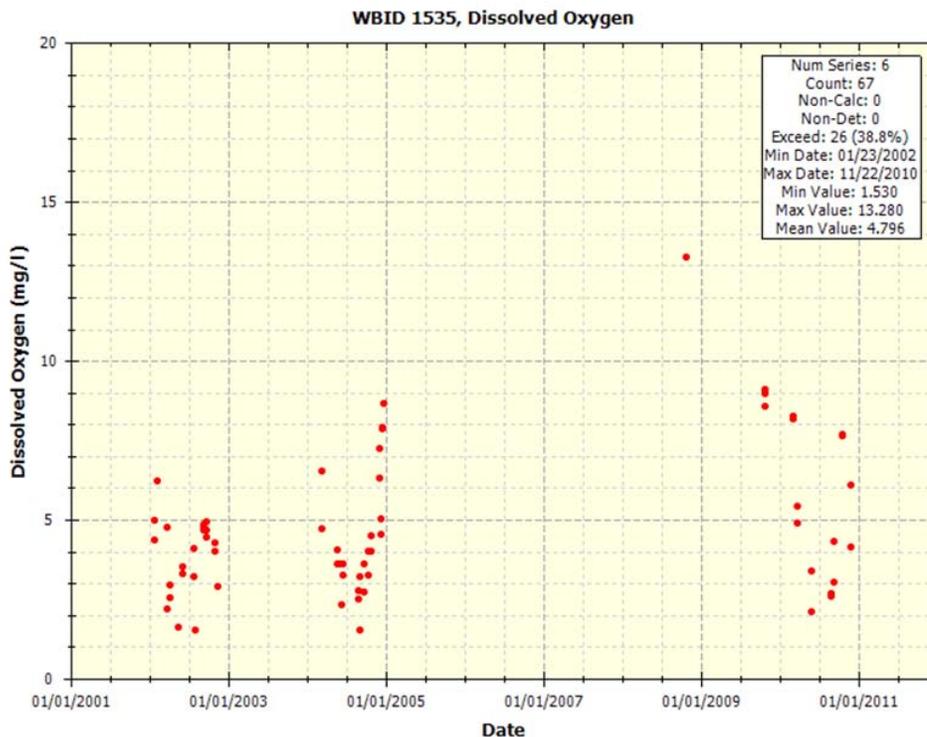


Figure 5.2 Dissolved oxygen concentrations for WBID 1535

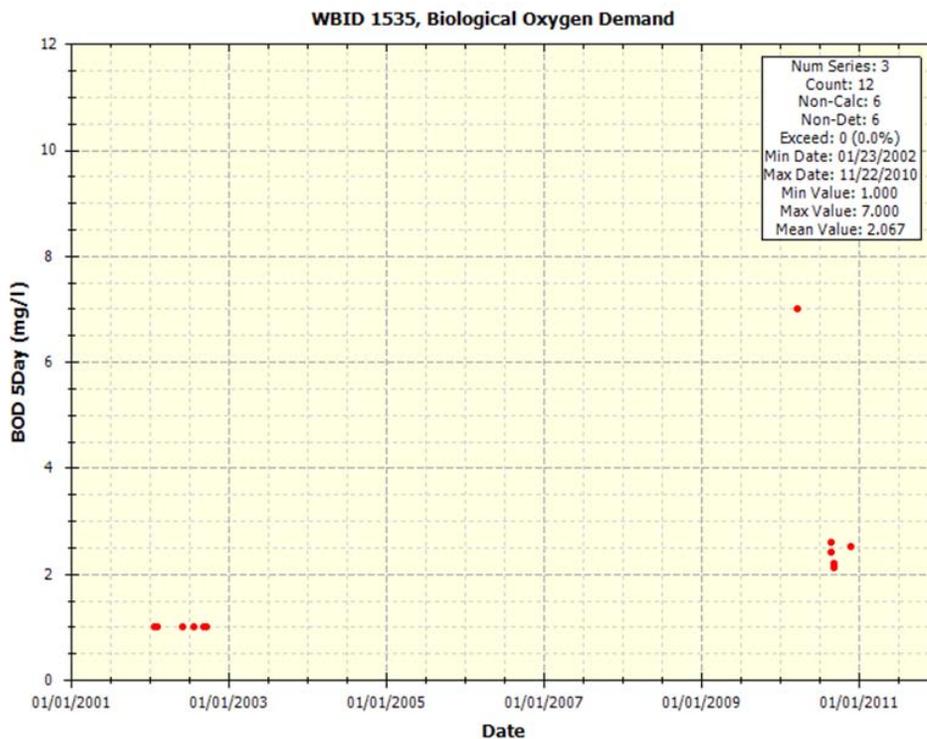


Figure 5.3 Biological oxygen demand concentrations for WBID 1535

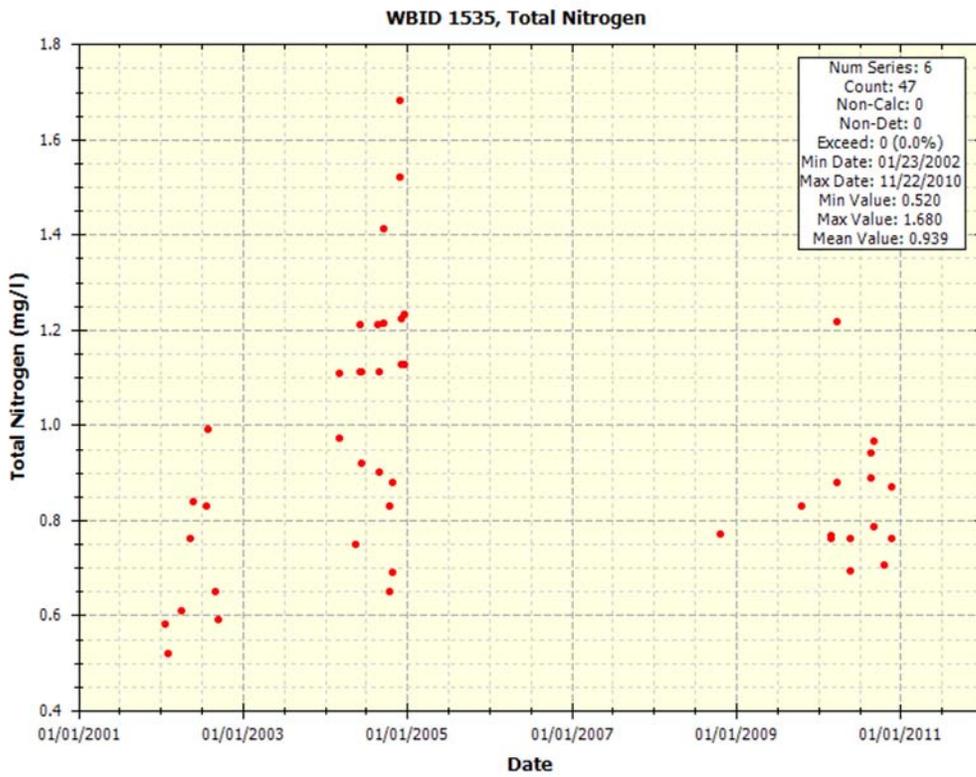


Figure 5.4 Total Nitrogen concentrations for WBID 1535

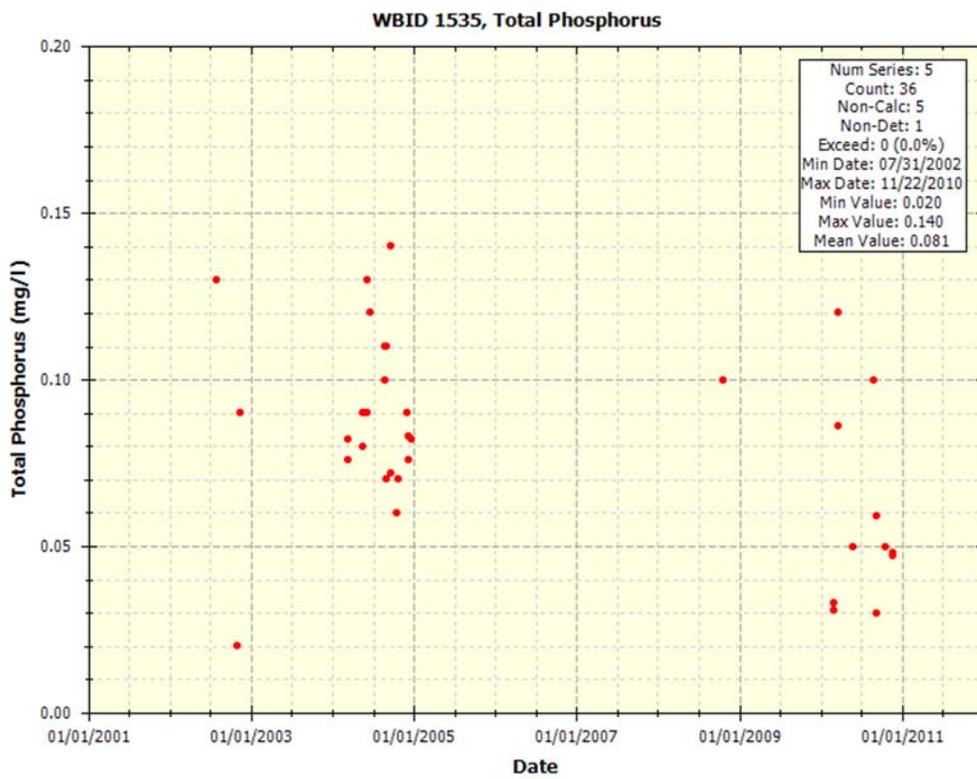


Figure 5.5 Total Phosphorus concentrations for WBID 1535

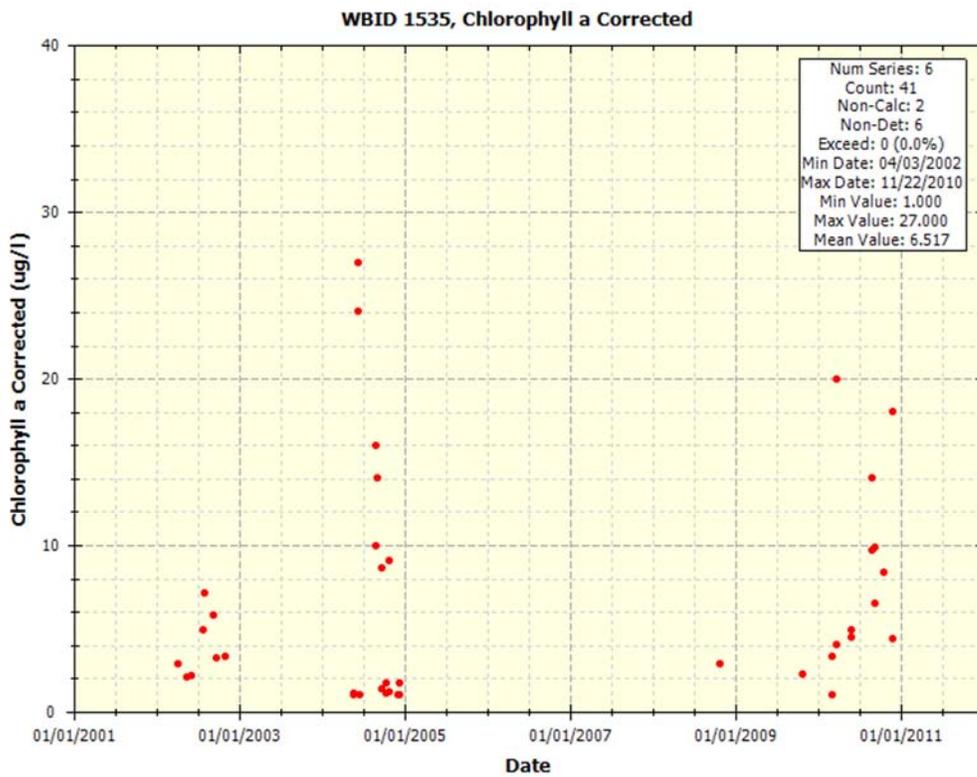


Figure 5.6 Total Phosphorus concentrations for WBID 1535

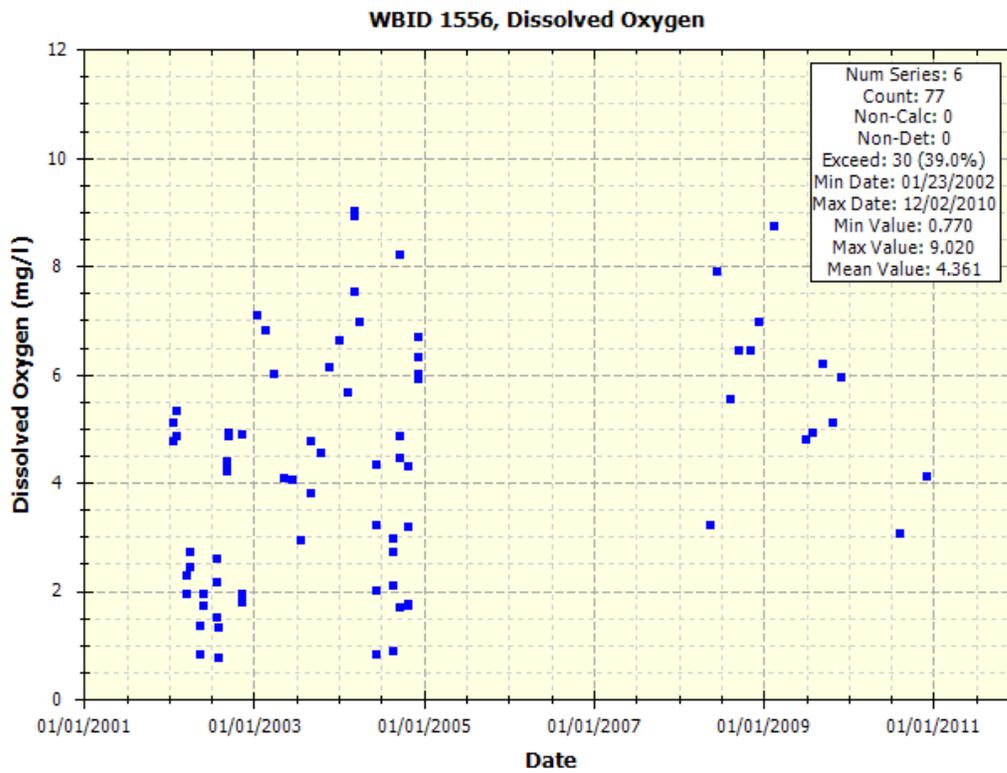


Figure 5.7 Dissolved oxygen concentrations for WBID 1556

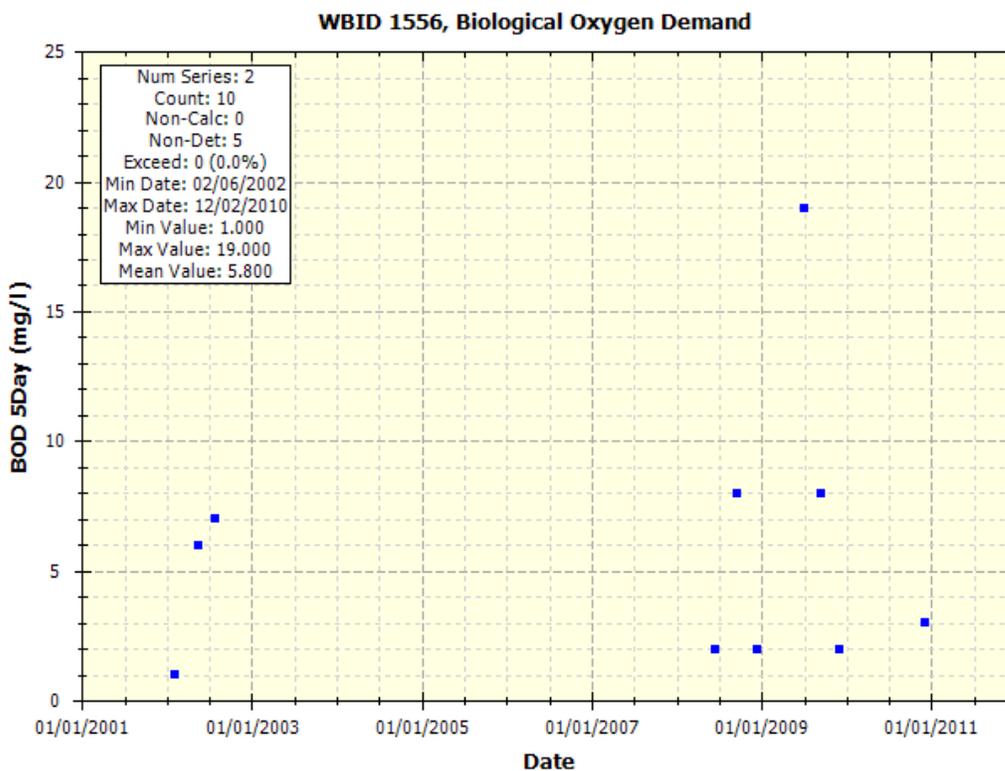


Figure 5.8 Biological oxygen demand concentrations for WBID 1556

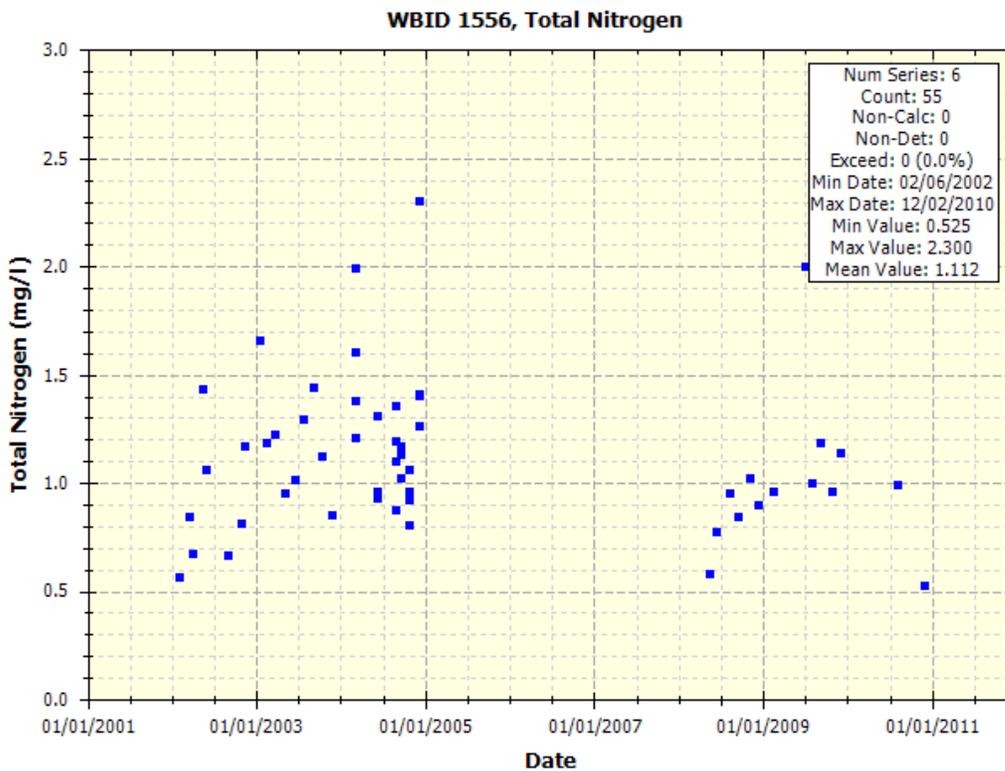


Figure 5.9 Total Nitrogen concentrations for WBID 1556

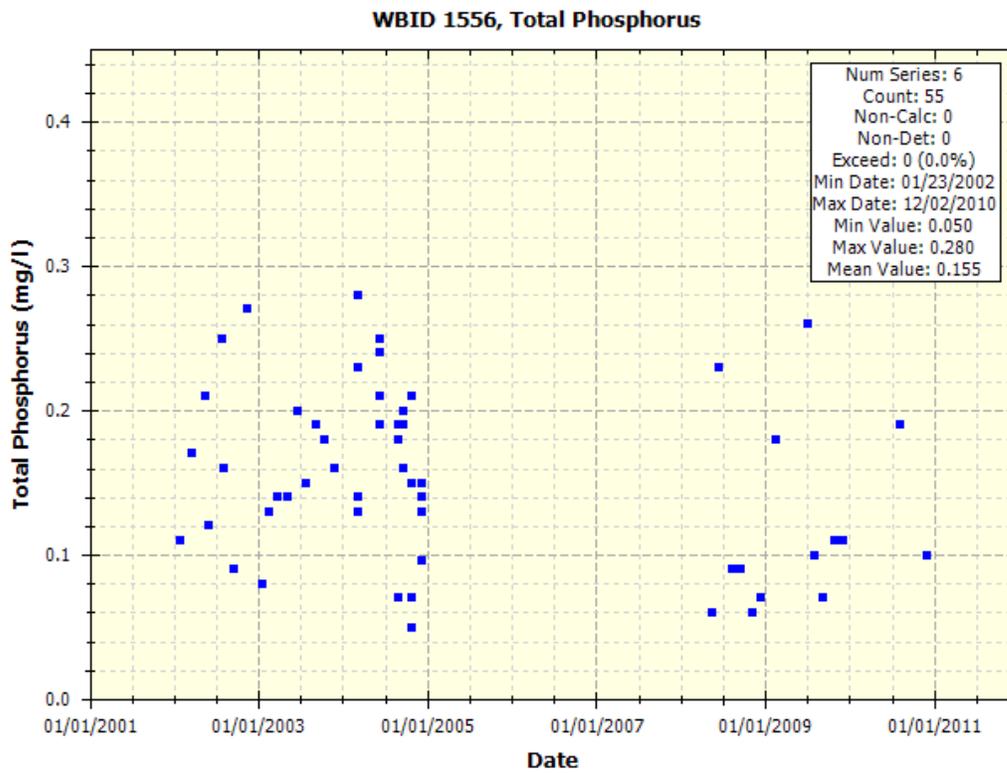


Figure 5.10 Total Phosphorus concentrations for WBID 1556

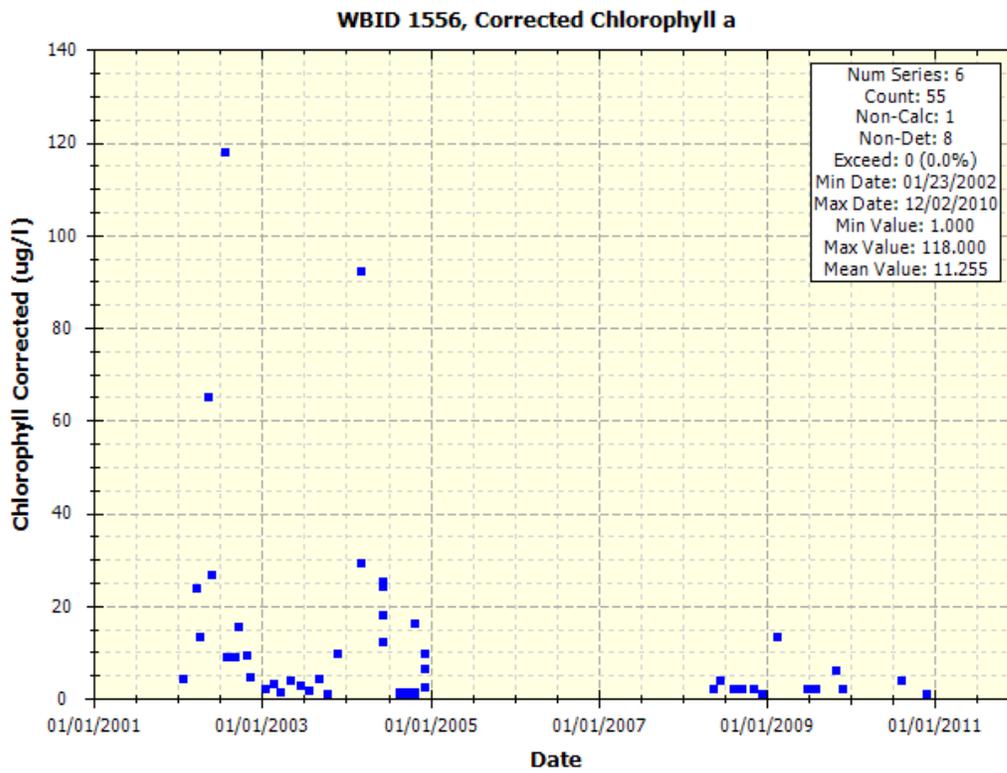


Figure 5.11 Chlorophyll a corrected concentrations for WBID 1556

## 6.0 SOURCE AND LOAD ASSESSMENT

An important part of the TMDL analysis is the identification of source categories, source subcategories, or individual sources of pollutants in the watershed and the amount of loading contributed by each of these sources. Sources are broadly classified as either point or nonpoint sources. Nutrients can enter surface waters from both point and nonpoint sources.

### 6.1 Point Sources

A point source is defined as a discernible, confined, and discrete conveyance from which pollutants are or may be discharged to surface waters. Point source discharges of industrial wastewater and treated sanitary wastewater must be authorized by National Pollutant Discharge Elimination System (NPDES) permits. NPDES permitted discharges include continuous discharges such as wastewater treatment facilities as well as some stormwater driven sources such as municipal separate stormwater sewer systems (MS4s), certain industrial facilities, and construction sites over one acre.

#### 6.1.1 Wastewater/Industrial Permitted Facilities

A TMDL wasteload allocation (WLA) is given to wastewater and industrial NPDES permitted facilities discharging to surface waters within an impaired watershed. Two of the four NPDES-permitted facilities located within the WBIDs do not have data associated with them. The permitted facilities are listed by WBID in Table 6.1 and shown in Figure 6.1. A land application system is located in WBID 1556, the City of Dunedin WWTF (FL0021326). This does not directly discharge to the impaired waterbody and is not considered a major industrial permitted facility.

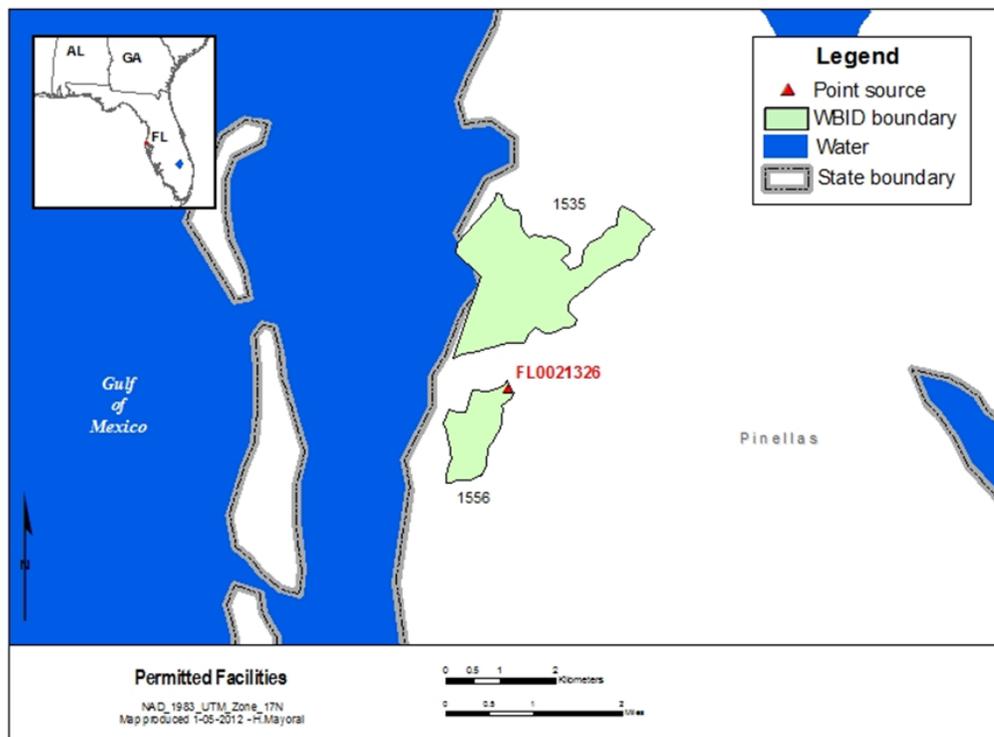


Figure 6.1 Permitted facilities in the impaired WBIDs in Coastal Pinellas County.

Table 6.1 Permitted Facilities by WBID.

WBID	Facility Number	Facility Name	Type
1556	FL0021326	City of Dunedin - Mainland WWTF	Domestic

### 6.1.2 Stormwater Permitted Facilities/MS4s

MS4s are point sources also regulated by the NPDES program. According to 40 CFR 122.26(b)(8), an MS4 is “a conveyance or system of conveyances (including roads with drainage systems, municipal streets, catch basins, curbs, gutters, ditches, man-made channels, or storm drains):

(i) Owned or operated by a State, city, town, borough, county, parish, district, association, or other public body (created by or pursuant to State law)...including special districts under State law such as a sewer district, flood control district or drainage district, or similar entity, or an Indian tribe or an authorized Indian tribal organization, or a designated and approved management agency under section 208 of the Clean Water Act that discharges into waters of the United States.

(ii) Designed or used for collecting or conveying storm water;

(iii) Which is not a combined sewer; and

(iv) Which is not part of a Publicly Owned Treatment Works

MS4s may discharge nutrients and other pollutants to waterbodies in response to storm events. In 1990, USEPA developed rules establishing Phase I of the NPDES stormwater program, designed to prevent harmful pollutants from being washed by stormwater runoff into MS4s (or from being dumped directly into the MS4) and then discharged from the MS4 into local waterbodies. Phase I of the program required operators of “medium” and “large” MS4s (those generally serving populations of 100,000 or greater) to implement a stormwater management program as a means to control polluted discharges from MS4s. Approved stormwater management programs for medium and large MS4s are required to address a variety of water quality related issues including roadway runoff management, municipal owned operations, hazardous waste treatment, etc.

Phase II of the rule extends coverage of the NPDES stormwater program to certain “small” MS4s. Small MS4s are defined as any MS4 that is not a medium or large MS4 covered by Phase I of the NPDES stormwater program. Only a select subset of small MS4s, referred to as “regulated small MS4s”, requires an NPDES stormwater permit. Regulated small MS4s are defined as all small MS4s located in “urbanized areas” as defined by the Bureau of the Census, and those small MS4s located outside of “urbanized areas” that are designated by NPDES permitting authorities.

In October 2000, USEPA authorized FDEP to implement the NPDES stormwater program in all areas of Florida except Indian tribal lands. FDEP’s authority to administer the NPDES program is set forth in Section 403.0885, Florida Statutes (FS). The three major components of NPDES stormwater regulations are:

- MS4 permits that are issued to entities that own and operate master stormwater systems, primarily local governments. Permittees are required to implement comprehensive stormwater management programs designed to reduce the discharge of pollutants from the MS4 to the maximum extent practicable.
- Stormwater associated with industrial activities, which is regulated primarily by a multisector general permit that covers various types of industrial facilities. Regulated industrial facilities must obtain NPDES stormwater permit coverage and implement appropriate pollution prevention techniques to reduce contamination of stormwater.
- Construction activity general permits for projects that ultimately disturb one or more acres of land and which require the implementation of stormwater pollution prevention plans to provide for erosion and sediment control during construction.

Stormwater discharges conveyed through the storm sewer system covered by the permit are subject to the WLA of the TMDL. Any newly designated MS4s will also be required to achieve the percent reduction allocation presented in this TMDL. Phase I and Phase II MS4 permits by WBID are listed on Table 6.2.

Table 6.2 MS4 Permits by WBID.

WBID	Segment Name	Phase	Facility Number	Affiliate	Co-Permittee
1535	Minnow Creek (Direct Runoff to Gulf)	I C	FLS000005*	Pinellas County	City of Dunedin
1556	Cedar Creek (Tidal)	I C	FLS000005*	Pinellas County	City of Dunedin

\*FDOT

## 6.2 Nonpoint Sources

Nonpoint sources of pollution are diffuse sources that cannot be identified as entering a waterbody through a discrete conveyance at a single location. For nutrients, these sources include runoff of agricultural fields, golf courses, and lawns, septic tanks, and residential developments outside of MS4 areas. Nonpoint source pollution generally involves a buildup of pollutants on the land surface that wash off during rain events and as such, represent contributions from diffuse sources, rather than from a defined outlet. Potential nonpoint sources are commonly identified, and their loads estimated, based on land cover data. Most methods calculate nonpoint source loadings as the product of the water quality concentration and runoff water volume associated with certain land use practices. The mean concentration of pollutants in the runoff from a storm event is known as the event mean concentration. In order to identify possible pollutant sources in the watershed, the landuse coverage was reviewed. Figure 3.2 provides a map of the land use in draining to the WBIDs, while Table 3.2 lists the land use distribution for the drainage area of the WBIDs. The following sections are organized by land use. Each section provides a description of the land use, the typical sources of nutrient loading (if applicable), and typical total nitrogen and total phosphorus event mean concentrations.

### 6.2.1 Urban Areas

Urban areas include land uses such as residential, industrial, extractive and commercial. Land uses in this category typically have somewhat high total nitrogen event mean concentrations and average total phosphorus event mean concentrations. Nutrient loading from MS4 and non-MS4 urban areas is attributable to multiple sources including stormwater runoff, leaks and overflows from sanitary sewer systems, illicit discharges of sanitary waste, runoff from improper disposal of waste materials, leaking septic systems, and domestic animals.

In 1982, Florida became the first state in the country to implement statewide regulations to address the issue of nonpoint source pollution by requiring new development and redevelopment to treat stormwater before it is discharged. The Stormwater Rule, as outlined in Chapter 403 FS, was established as a technology-based program that relies upon the implementation of Best Management Practices (BMPs) that are designed to achieve a specific level of treatment (i.e., performance standards) as set forth in Chapter 62-40, FAC.

Florida's stormwater program is unique in having a performance standard for older stormwater systems that were built before the implementation of the Stormwater Rule in 1982. This rule states: "the pollutant loading from older stormwater management systems shall be reduced as needed to restore or maintain the beneficial uses of water." [FAC 62-40-.432(2)(c)]

Nonstructural and structural BMPs are an integral part of the State's stormwater programs. Nonstructural BMPs, often referred to as "source controls", are those that can be used to prevent the generation of nonpoint source pollutants or to limit their transport off-site. Typical nonstructural BMPs include public education, land use management, preservation of wetlands and floodplains, and minimization of impervious surfaces. Technology-based structural BMPs are used to mitigate the increased stormwater peak discharge rate, volume, and pollutant loadings that accompany urbanization.

Urban, residential, and commercial developments are likely a significant source of non-point source pollution, which includes excessive nutrients and oxygen-demanding substances. High-intensity developed land use accounts for 56 percent, the highest percentage of total land use, in the both WBID 1535 and WBID 1556. Approximately 19 percent of the total land use in WBID 1535 and 24 percent of the total land use in WBID 1556 is classified as medium-intensity developed.

#### ***Onsite Sewage Treatment and Disposal Systems (Septic Tanks)***

As stated above leaking septic tanks or onsite sewage treatment and disposal systems (OSTDs) can contribute to nutrient loading in urban areas. Water from OSTDs is typically released to the ground through on-site, subsurface drain fields or boreholes that allow the water from the tank to percolate (usually into the surficial aquifers) and either transpire to the atmosphere through surface vegetation or add to the flow of shallow ground water. When properly sited, designed, constructed, maintained, and operated, OSTDs are a safe means of disposing of domestic waste. The effluent from a well-functioning OSTD receives natural biological treatment in the soil and is comparable to secondarily treated wastewater from a sewage treatment plant. When not functioning properly, OSTDs can be a source of nutrients, pathogens, and other pollutants to both ground water and surface water.

The State of Florida Department of Health publishes data on new septic tank installations and the number of septic tank repair permits issued for each county in Florida. Table 6.3 summarizes the cumulative number of septic systems installed in Pasco and Pinellas Counties since the 1970 census

and the total number of repair permits issued for the ten years between 1999-2000 and 2009-2010 (FDOH 2009). The data do not reflect septic tanks removed from service. Leaking septic systems could be a relevant source of organic and nutrient loading in the watershed.

Table 6.3 County estimates of septic tanks and repair permits in Pinellas County, Florida.

County	Number of Septic Tanks (1970-2008)	Number of Repair Permits Issued (2000-2010)
Pinellas	23,869	3,015

Note: Source: <http://www.doh.state.fl.us/environment/ostds/statistics/ostdsstatistics.htm>

### 6.2.2 Pastures

Pastures include cropland and improved and unimproved pasturelands, such as non-tilled grasses woodland pastures, feeding operations, nurseries and vineyards; as well as specialty farms. Agricultural activities, including runoff of fertilizers or animal wastes from pasture and cropland and direct animal access to streams, can generate nutrient loading to streams. The highest total nitrogen and total phosphorus event mean concentrations are associated with agricultural land uses.

Land use data shows that there are no pastures or row crop land uses within any of the impaired WBIDs, nor within their contributing subwatersheds.

### 6.2.3 Clear cut/Sparse

The clear cut/sparse land use classification includes recent clear cuts, areas of sparse vegetation or herbaceous dry prairie, shrub and brushland, other early successional areas, and mixed rangeland. Event mean concentrations for clear cut/sparse can be relatively low for total nitrogen and low for total phosphorus. There were no clear cut/sparse land uses within the impaired waterbodies, or within their contributing subwatersheds.

### 6.2.4 Forests

Upland forests include flatwoods, oak, various types of hardwoods, conifers and tree plantations. Wildlife, located within forested areas, deposit their feces onto land surfaces where it can be transported to nearby streams during storm events. Generally, the pollutant load from wildlife is assumed to represent background concentrations. Event mean concentrations for upland forests are low for both total nitrogen and total phosphorus. The contributing subwatershed for WBID 1535 has 29 acres of forested land, accounting for 3 percent of the total land use, and the contributing subwatersheds for WBID 1556 have 59 acres of forested land, accounting for 4 percent of the total land use.

### 6.2.5 Water and Wetlands

Water and Wetlands often have very low nutrient loadings, although decaying organic matter in wetlands can contribute to high organic nutrient concentrations. Wetlands account for a relatively low portion of the total land use in the contributing subwatershed for WBID 1535 and 1556 at 5 percent and 4 percent of the total land use, respectively. While open water makes up a small portion of the land use in WBID 1556, it is approximately 14 percent of the total land use in WBID 1535.

### **6.2.6 Quarries/Strip mines**

Land use classification includes quarries, strip mines, exposed rock and soil, fill areas, reclaimed lands, and holding ponds. Event mean concentrations for some barren lands can be high in total nitrogen. These types of land cover are not found within either of the impaired waterbodies.

## 7.0 ANALYTICAL APPROACH

In the development of a TMDL there needs to be a method for relating current loadings to the observed water quality problem. This relationship could be statistical (regression for a cause and effect relationship), empirical (based on observations not necessarily from the waterbody in question) or mechanistic (physically and/or stochastically based) that inherently relate cause and effect using physical and biological relationships.

Mechanistic models were used in the development of the Coastal Pinellas County TMDL to relate the physical and biological relationships. A dynamic watershed model was used to predict the quantity of water and pollutants associated with runoff from rain events. The watershed model was linked to a hydrodynamic model that simulated tidal influences in the river. Both models were linked to a water quality simulation model that integrated the loadings and flow from the watershed model with flow from the hydrodynamic model to predict the water quality in the receiving waterbodies.

The period of simulation that was considered in the development of this TMDL is January 1, 2002 to December 31, 2009. The models were used to predict time series for BOD, TN, TP, and DO. The models were calibrated to current conditions and were then used to predict improvements in water quality as function of reductions in loadings.

### 7.1 *Mechanistic Models*

#### 7.1.1 Loading Simulation Program C++ (LSPC)

LSPC is the Loading Simulation Program in C++, a watershed modeling system that includes streamlined Hydrologic Simulation Program Fortran (HSPF) algorithms for simulating hydrology, sediment, and general water quality overland as well as a simplified stream fate and transport model. LSPC is derived from the Mining Data Analysis System (MDAS), which was originally developed by USEPA Region 3 (under contract with Tetra Tech) and has been widely used for TMDLs. In 2003, the USEPA Region 4 contracted with Tetra Tech to refine, streamline, and produce user documentation for the model for public distribution. LSPC was developed to serve as the primary watershed model for the USEPA TMDL Modeling Toolbox. LSPC was used to simulate runoff (flow, biological oxygen demand, total nitrogen, total phosphorus and dissolved oxygen) from the land surface using a daily timestep for current and natural conditions. LSPC provided tributary flows and temperature to the EFDC estuary models and tributary water quality concentrations to WASP7 estuary models.

In order to evaluate the contributing sources to a waterbody and to represent the spatial variability of these sources within the watershed model, the contributing drainage area was represented by a series of sub-watersheds. The subwatersheds were developed using the USGS 12-digit hydrologic unit code, USGS National Hydrographic Dataset.

The LSPC model is driven by precipitation and other climatological data (e.g., air temperature, evapotranspiration, dew point, cloud cover, wind speed, solar radiation), and data from nearby weather stations were used in the modeling effort. The subwatersheds were represented by the hydrologic soil group that had the highest percentage of coverage within the boundaries of the subwatershed.

The basis for distributing hydrologic and pollutant loading parameters throughout the watershed is correlated to soil characteristics and land use practices. The 2006 National Land Use Cover Database (NLCD), 2004 SWFWMD Land Cover, and the soil survey geographic database (SSURGO) were used in the modeling effort and subsequent TMDL development.

The modeling assumptions are outlined in the Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix C: Watershed Hydrology and Water Quality Modeling Report for 19 Florida Watersheds (USEPA 2012a). The calibration results for the Crystal Watershed are located in the Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Water Waters - Volume 1: Estuaries, Appendix C Attachment 14: The Crystal Watershed (USEPA 2012b).

### **7.1.2 Environmental Fluids Dynamic Code (EFDC)**

The EFDC model is a part of the USEPA TMDL Modeling Toolbox due to its application in many TMDL-type projects. As such, the code has been peer reviewed and tested and has been freely distributed and supported by Tetra Tech. EFDC was developed by Dr. John Hamrick (Hamrick 1992) and is currently supported by Tetra Tech for USEPA Office of Research and Development (ORD), USEPA Region 4, and USEPA Headquarters. The models, tools, and databases in the TMDL Modeling Toolbox are continually updated and upgraded through TMDL development in Region 4. EFDC is a multifunctional, surface-water modeling system, which includes hydrodynamic, sediment contaminant, and eutrophication components. The EFDC model is capable of 1, 2, and 3-dimensional spatial resolution. The model employs a curvilinear-orthogonal horizontal grid and a sigma or terrain following vertical grid.

The EFDC hydrodynamic model can run independently of a water quality model. The EFDC model simulates the hydrodynamic and constituent transport and then writes a hydrodynamic linkage file for a water quality model such as the Water Quality Analysis Program (WASP7) model. This model linkage, from EFDC hydrodynamics to WASP water quality, has been applied on many USEPA Region 4 projects in support of TMDLs and has been well tested (Wool et al. 2003).

Gulf of Mexico bathymetry was used to create the grid for the EFDC model. Inland boundary grid cells received LSPC simulated watershed discharges and point source discharges. Hourly water surface elevation time series data from the National Oceanic and Atmospheric Administration (NOAA) tidal stations were initially used to simulate tides at the open boundary. Observed temperature data at water quality stations were used to simulate the temperature at the open boundaries, and average salinity in the Gulf of Mexico was used to simulate salinity.

In the Big Bend Estuary model, EFDC was used to model water quality. The selection of the EFDC QUAL2 based water quality model was necessary due to the large grid dimensions which the present WASP7 model could not handle. Time series of watershed loads were received by LSPC simulations for dissolved mineral and organic nutrients, TSS, CBOD and DO. Open boundary offshore conditions were calculated from measured water quality data.

The modeling assumptions are outlined in the Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix D: Hydrodynamic and Water Quality

Modeling Report for Nutrient Criteria for 11 Florida Estuary Systems (USEPA 2012c). The calibration results for the Tampa Bay estuary are located in the Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix D Attachment 7: Florida Big Bend Hydrodynamic and Water Quality Model Calibration and Validation: Tables and Figures (USEPA 2012d).

### **7.1.3 Water Quality Analysis Simulation Program (WASP7)**

The Water Quality Analysis Simulation Program Version 7.4.1 (WASP7) is an enhanced Windows version of the USEPA Water Quality Analysis Simulation Program (WASP) (Di Toro et al., 1983; Connolly and Winfield, 1984; Ambrose, R.B. et al., 1988), with upgrades to the user's interface and the model's capabilities. The major upgrades to WASP have been the addition of multiple BOD components, addition of sediment diagenesis routines, and addition of periphyton routines. The hydrodynamic file generated by EFDC is compatible with WASP7 and it transfers segment volumes, velocities, temperature and salinity, as well as flows between segments. The time step is set in WASP7 based on the hydrodynamic simulation.

WASP7 helps users interpret and predict water quality responses to natural phenomena and man-made pollution for various pollution management decisions. WASP7 is a dynamic compartment-modeling program for aquatic systems, including both the water column and the underlying benthos. The time-varying processes of advection, dispersion, point and diffuse mass loading and boundary exchange are represented in the basic program. Water quality processes are represented in special kinetic subroutines that are either chosen from a library or written by the user. WASP is structured to permit easy substitution of kinetic subroutines into the overall package to form problem-specific models. WASP7 comes with two such models, TOXI for toxicants and EUTRO for conventional water quality.

WASP7 was not used in the Big Bend Model because of its large grid dimensions. WASP7 was used to develop the smaller Coastal Pinellas Mechanistic Model. Because of its proximity to the Tampa-Sarasota Bay model, the assumptions, water quality parameters, and calibration methods used in the Tampa-Sarasota model were applied to the Coastal Pinellas model.

The modeling assumptions are outlined in the Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix D: Hydrodynamic and Water Quality Modeling Report for Nutrient Criteria for 11 Florida Estuary Systems (USEPA 2012c). The calibration results for the Tampa Bay estuary are located in the Technical Support Document for U.S. EPA's Proposed Rule for Numeric Nutrient Criteria for Florida's Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix D Attachment 11: Tampa-Sarasota Bay Hydrodynamic and Water Quality Model Calibration and Validation: Tables and Figures (USEPA 2012e).

### **7.1.4 Coastal Pinellas County Mechanistic Model**

To model the WBIDs 1535 and 1556, the relatively large subwatersheds in the Crystal Watershed Model were re-delineated using the USGS NHD catchments. Only the subwatersheds draining to the impaired WBIDs were used in the Coastal Pinellas County model, and the re-delineated model used the same parameterization as the larger Crystal model. Additionally, the original EFDC model grid was re-drawn at a smaller scale and

extended up into the small tidal creeks. The Big Bend model parameterization was used in the Coastal Pinellas County model, and outputs from the adjacent Big Bend model grid cells were used as the open boundary conditions in the Coastal Pinellas County model. The Coastal Pinellas County LSPC model outputs were input into the inland cells.

A WASP7 grid was developed for the Coastal Pinellas County model and parameterized using the Tampa Estuary model WASP7 parameters. The hydrodynamic simulation from the Coastal Pinellas County model was input into the WASP7 model. Loadings from the LSPC model were input into the inland cells, and EFDC water quality outputs were used for the WASP7 open boundary cells. Following re-delineation, the model was evaluated against measured water quality data within the modeled subwatershed and the calibration was updated accordingly.

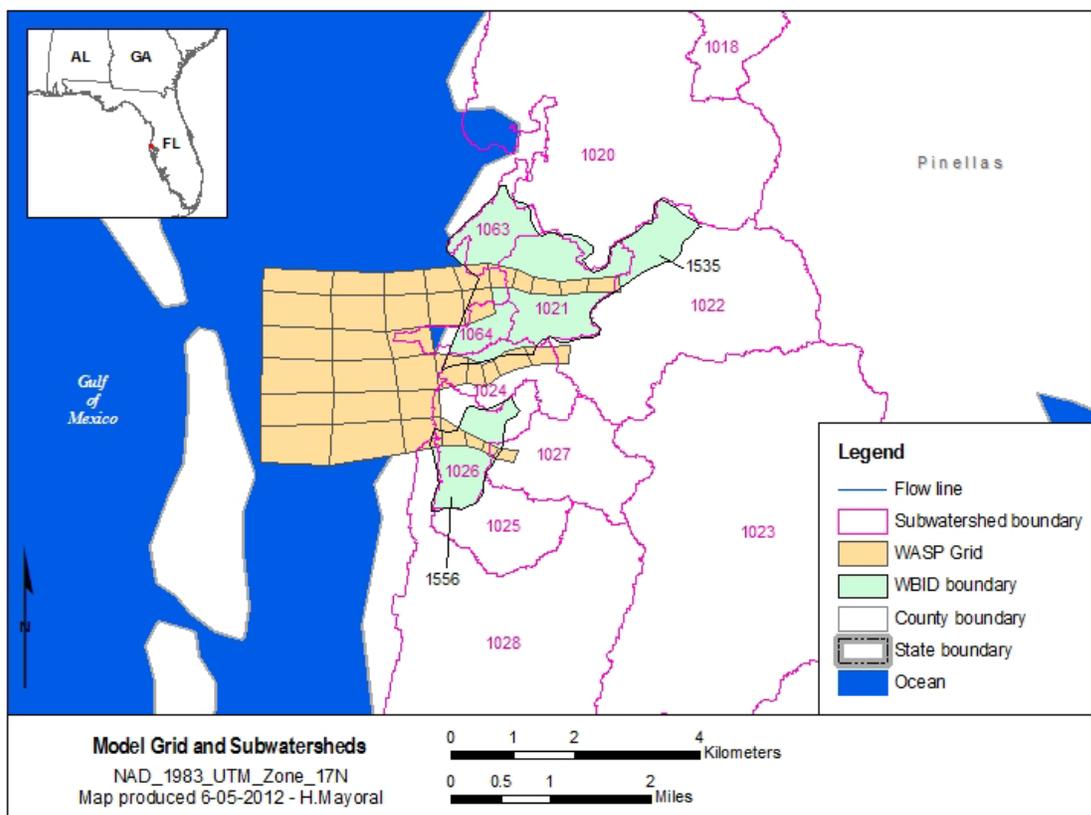


Figure 7.1 LSPC subwatershed boundaries and WASP model grid for WBIDs 1535 and 1556

## 7.2 Scenarios

Two modeling scenarios were developed and evaluated in this TMDL determination: a current condition and a natural condition scenario. Concentrations and loadings were evaluated to determine if DO concentrations in the natural condition scenario could meet the DO standard, and the impact of nutrients on the DO concentrations. The results from the scenarios were used to develop the TMDL.

### 7.2.1 Current Condition

The current condition scenario evaluated current hydrologic and water quality conditions in the watershed, specifically water quality concentration and loadings at the outlet of WBIDs 1535 and 1556. The current condition annual average concentrations for the Clam Bayou WBIDs are presented in Table 7.1. The current condition simulation was used to determine the base loadings for the WBIDs. These base loadings (Table 7.2), when compared with the TMDL scenarios, were used to determine the percent reduction in nutrient loads that will be needed to achieve water quality standards. Figures 7.2 through 7.9 provide the calibrated current condition modeled parameters for WBID 1535 and 1556.

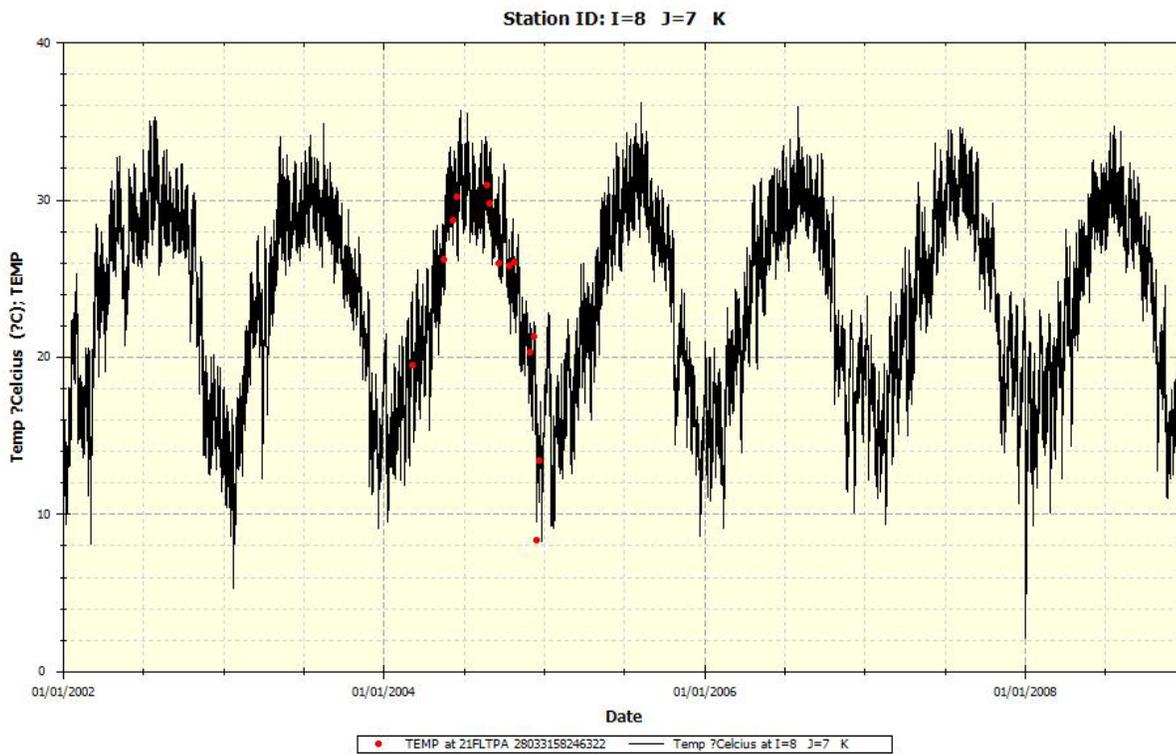


Figure 7.2 Simulated temperature (°C) verse measured temperature in WBID 1535 at station 21FLTPA 28033158246322

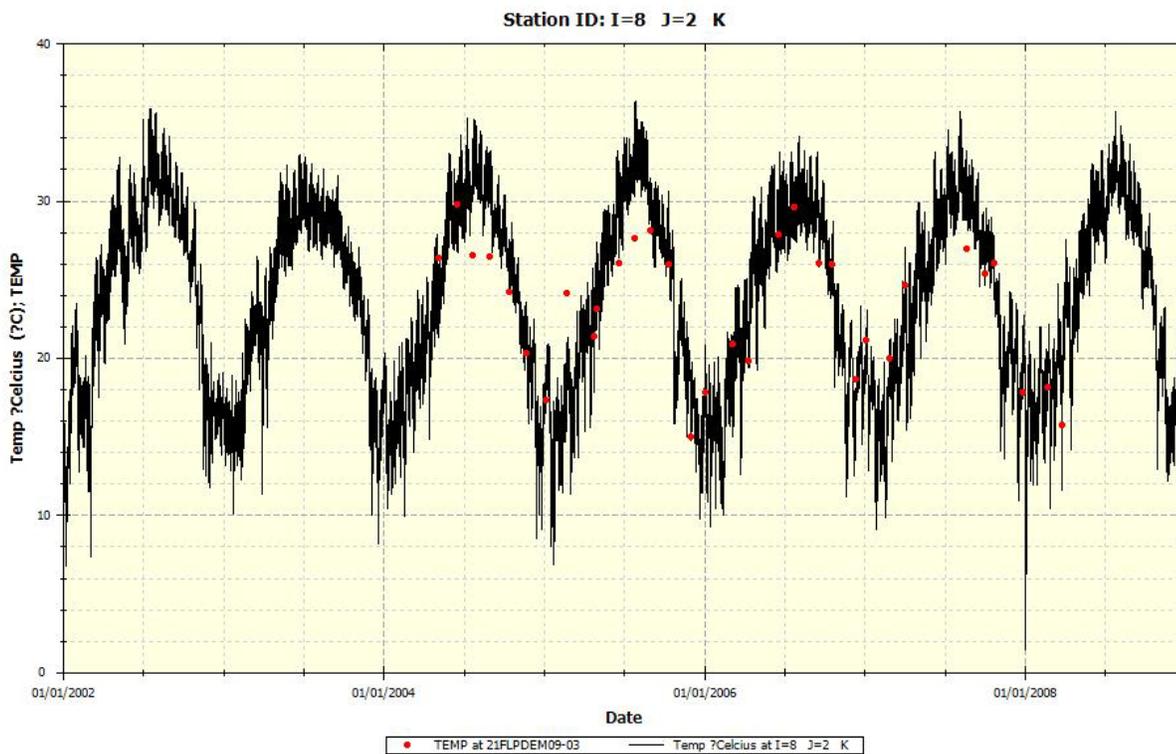


Figure 7.3 Simulated temperature (°C) verse measured temperature in WBID 1556 at station 21FLPDEM09-03

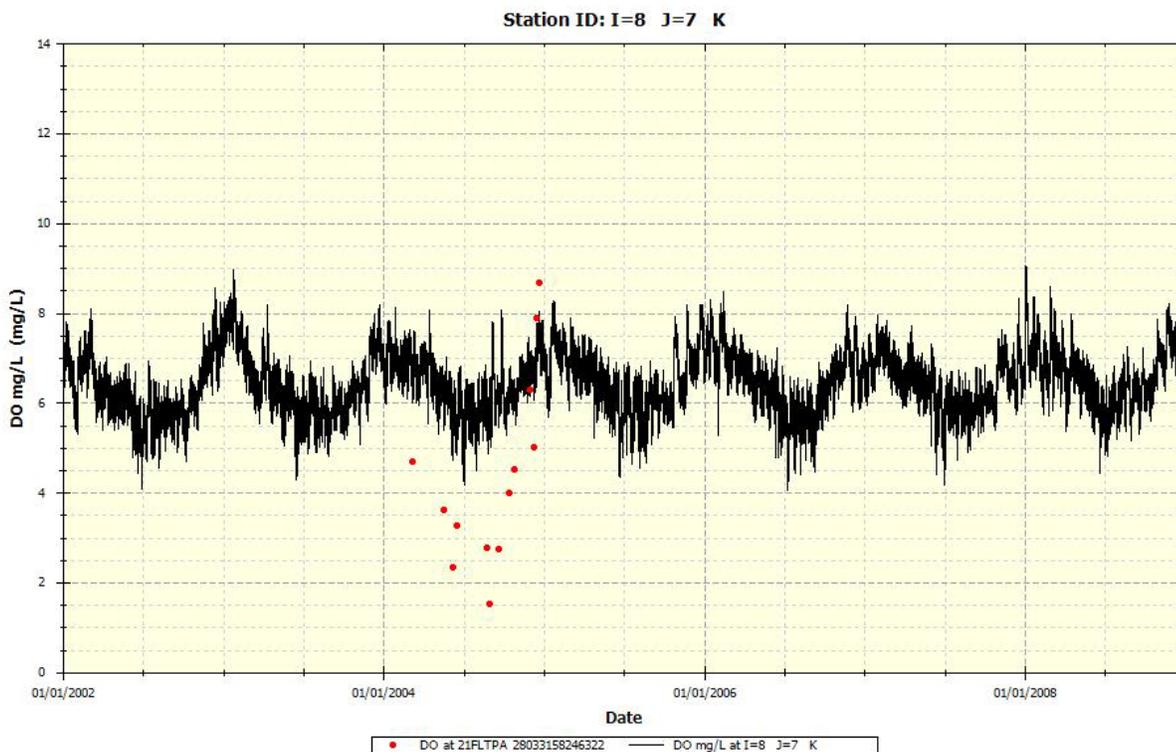


Figure 7.4 Simulated dissolved oxygen (mg/L) verse measured dissolved oxygen in WBID 1535 at station 21FLTPA 28033158246322

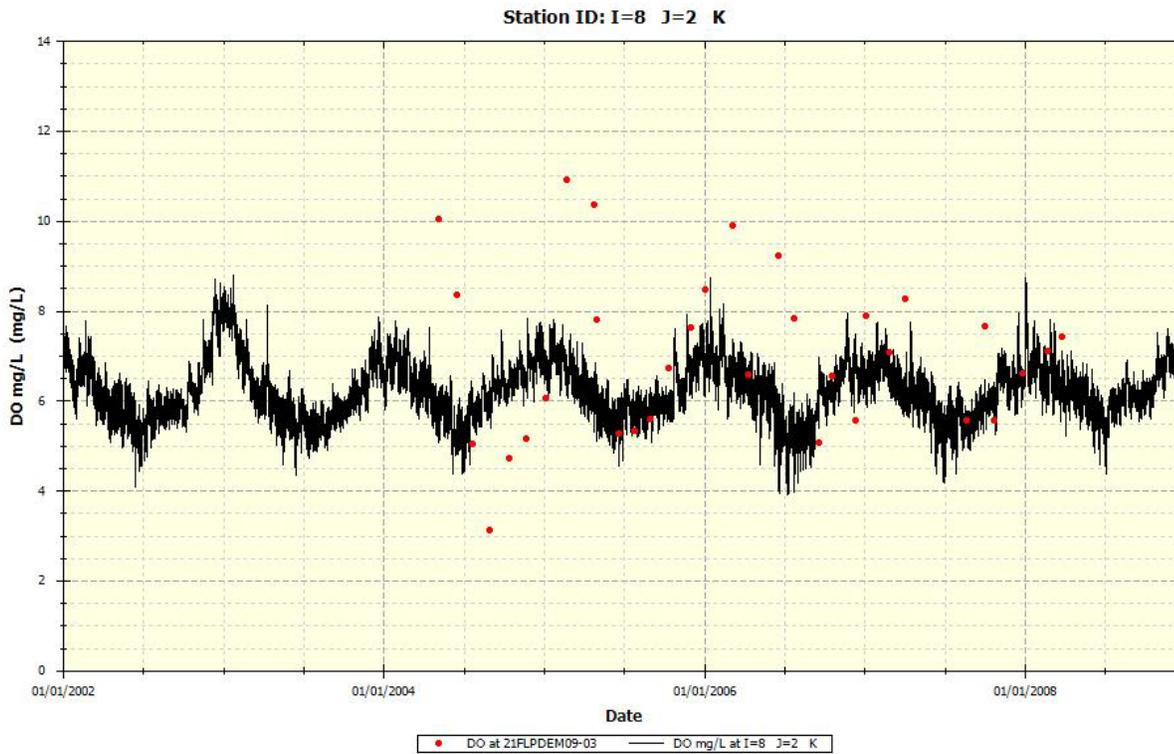


Figure 7.5 Simulated dissolved oxygen (mg/L) verse measured dissolved oxygen in WBID 1556 at station 21FLPDEM09-03

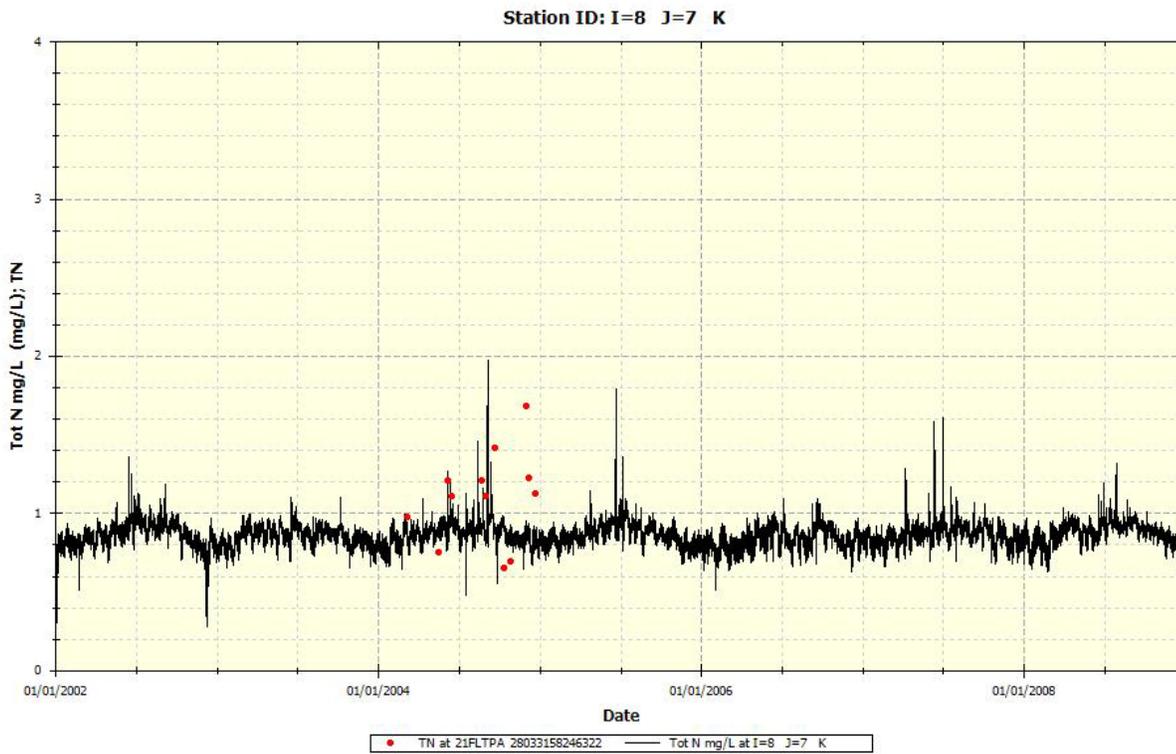


Figure 7.6 Simulated total nitrogen (mg/L) verse measured total nitrogen in WBID 1535 at station 21FLTPA 28033158246322

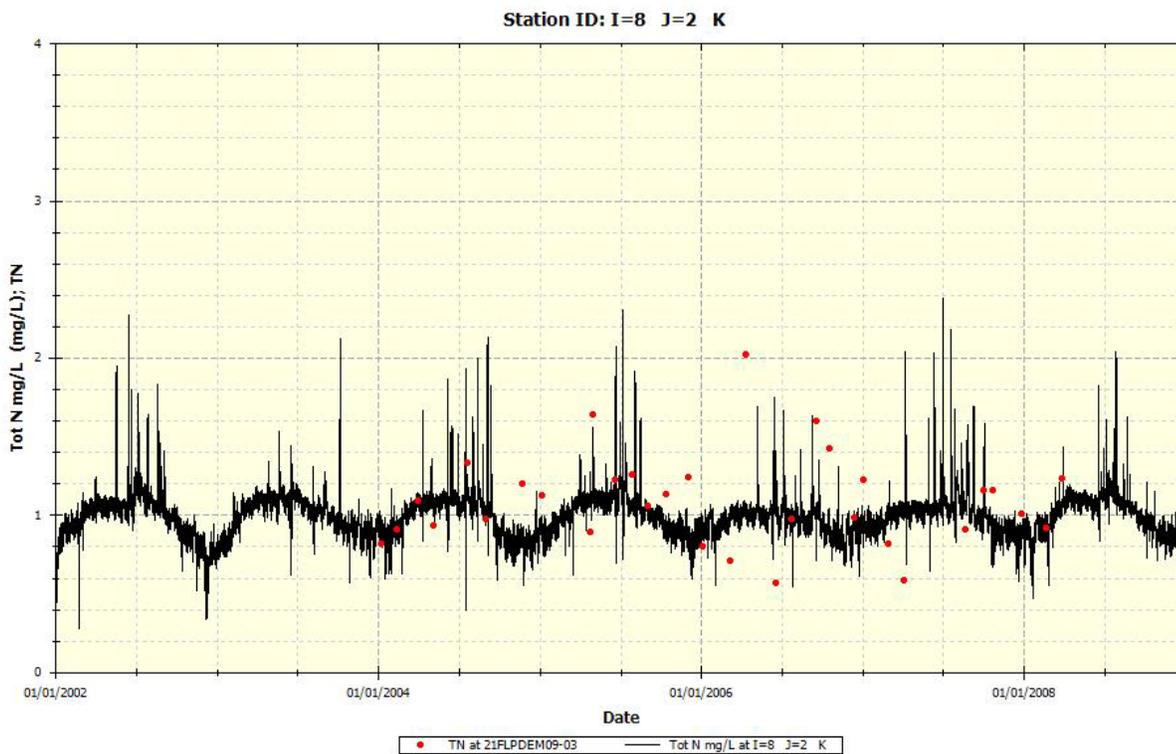


Figure 7.7 Simulated total nitrogen (mg/L) verse measured total nitrogen in WBID 1556 at station 21FLPDEM09-03

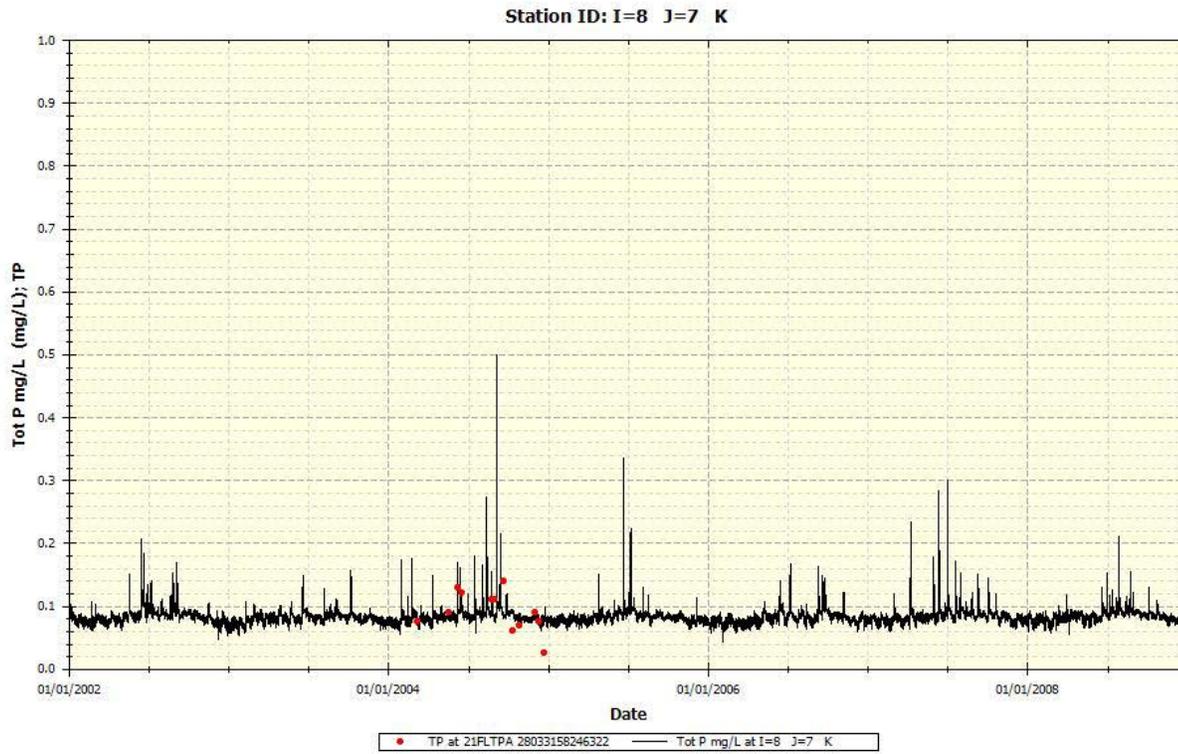


Figure 7.8 Simulated total phosphorus (mg/L) verse measured total phosphorus in WBID 1535 at station 21FLTPA 28033158246322

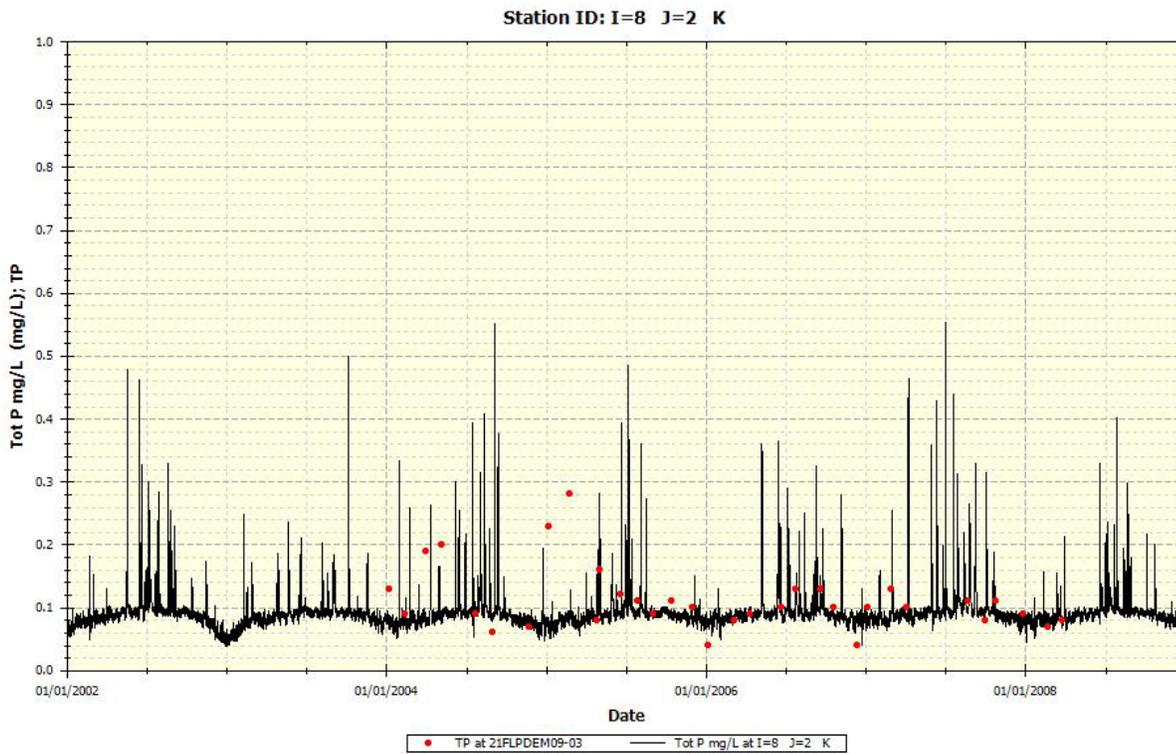


Figure 7.9 Simulated total phosphorus (mg/L) verse measured total phosphorus in WBID 1556 at station 21FLPDEM09-03

Table 7.1 Current condition concentrations in WBIDs 1535 and 1556.

Parameter	WBID 1535	WBID 1556
Total nitrogen (mg/L)	0.86	0.99
Total phosphorus (mg/L)	0.08	0.09
BOD (mg/L)	2.31	2.48
DO (mg/L)	6.42	6.23

Table 7.2 Current condition loadings in WBIDs 1535 and 1556.

Parameter	WBID 1535		WBID 1556	
	WLA (kg/yr)	LA (kg/yr)	WLA (kg/yr)	LA (kg/yr)
Total nitrogen (mg/L)	--	1,090	--	3,056
Total phosphorus (mg/L)	--	139	--	389

BOD (mg/L)	--	3,158	--	8,360
------------	----	-------	----	-------

### 7.2.2 Natural Condition

The natural condition scenario was developed to estimate water quality conditions if there was no impact from anthropogenic sources. The point sources located in the model were removed for the natural condition analysis. Landuses that were associated with anthropogenic activities (urban, agriculture, transportation, barren lands and rangeland) were converted to upland forests or forested wetlands based on the current ration of forest and wetland landuses in the model. The natural condition water quality predictions are presented in Table 7.3 and 7.4. Figures 7.17 through 7.21 provide time series of the natural condition scenario water parameters.

The purpose of the natural conditions scenario was to determine whether water quality standards could be achieved without abating the naturally occurring loads from the watershed. The natural condition modeling scenario indicated that the DO standard is not achievable under natural conditions, indicating that low DO is a naturally occurring phenomenon in the WBIDs 1716A, 1716B, 1716C, and 1716D. Additionally, the mean DO concentration in the natural condition scenario was lower than the mean DO concentration in the current condition scenario.

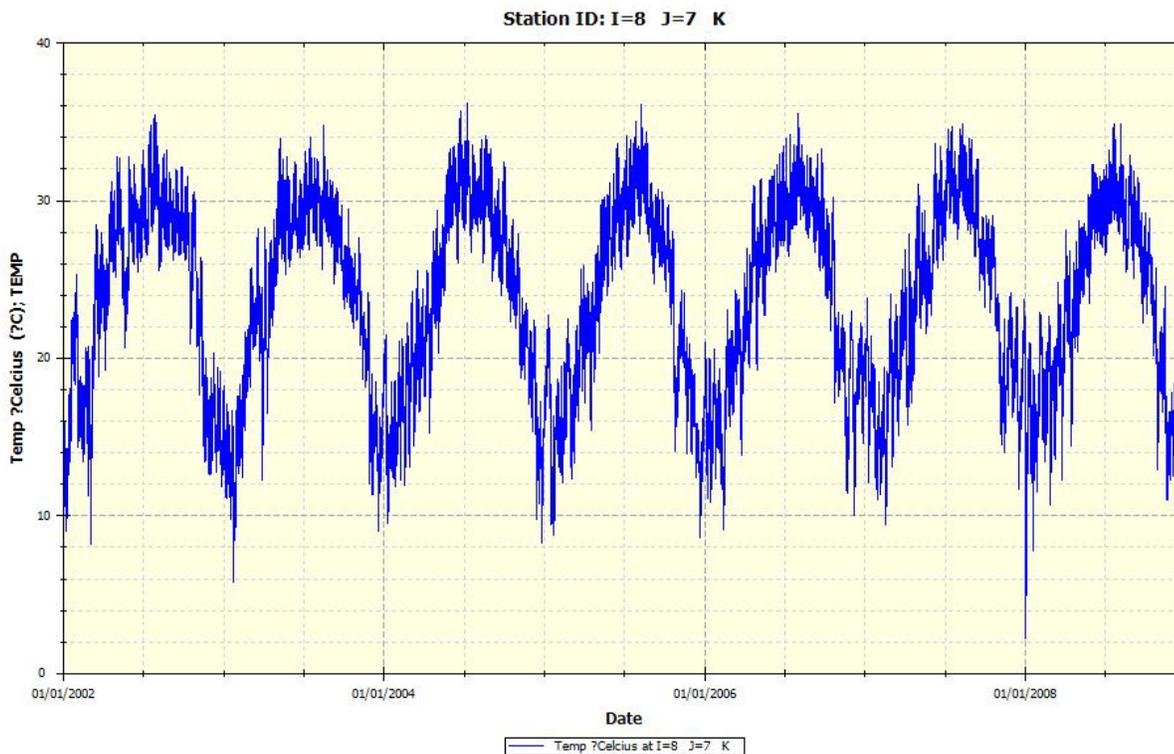


Figure 7.10 Natural condition scenario temperature (°C) in WBID 1535

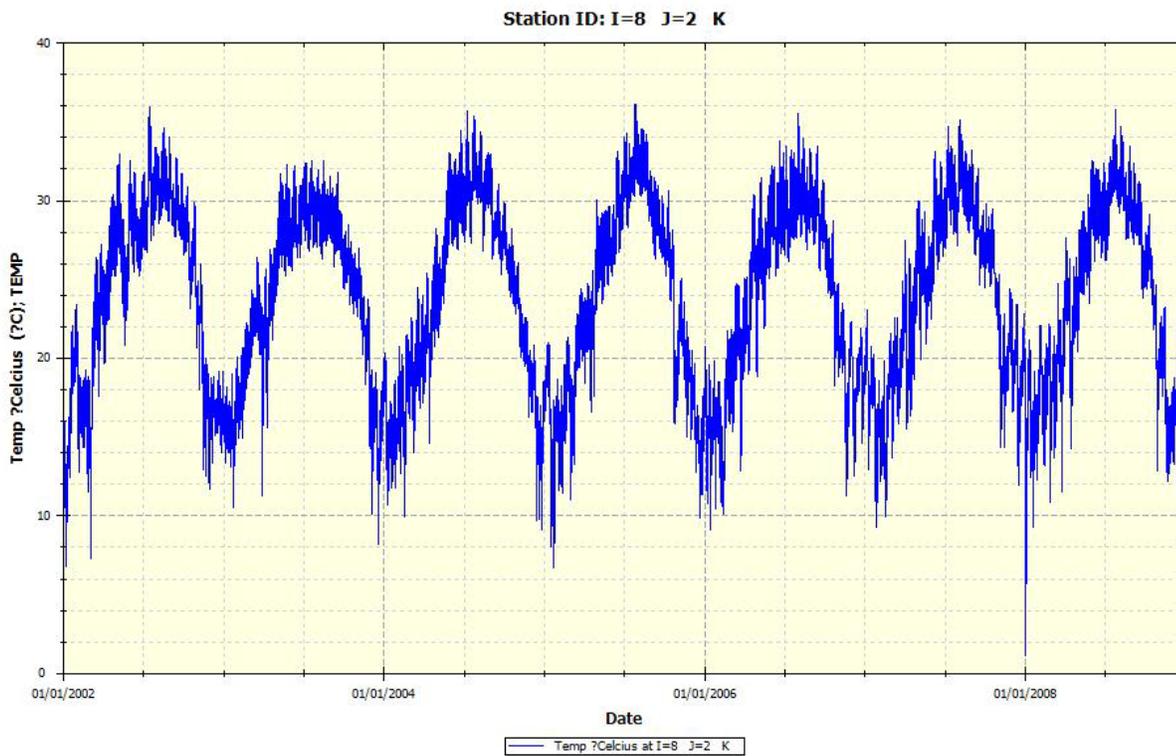


Figure 7.11 Natural condition scenario temperature (°C) in WBID 1556

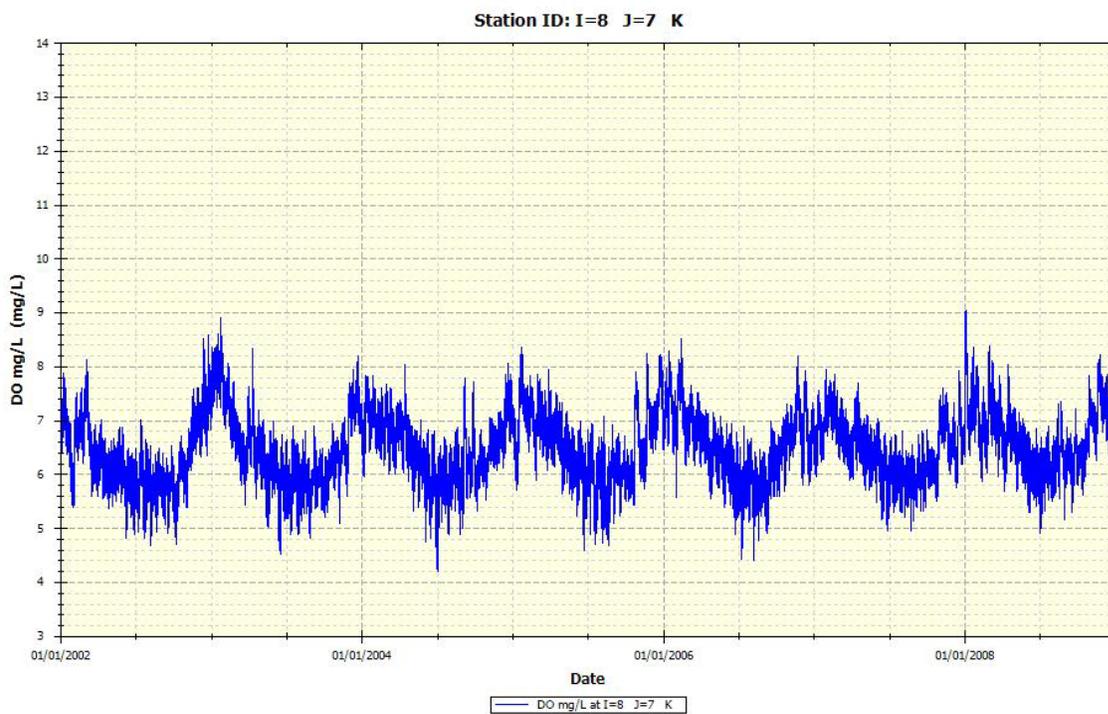


Figure 7.12 Natural condition scenario dissolved oxygen (mg/L) in WBID 1535

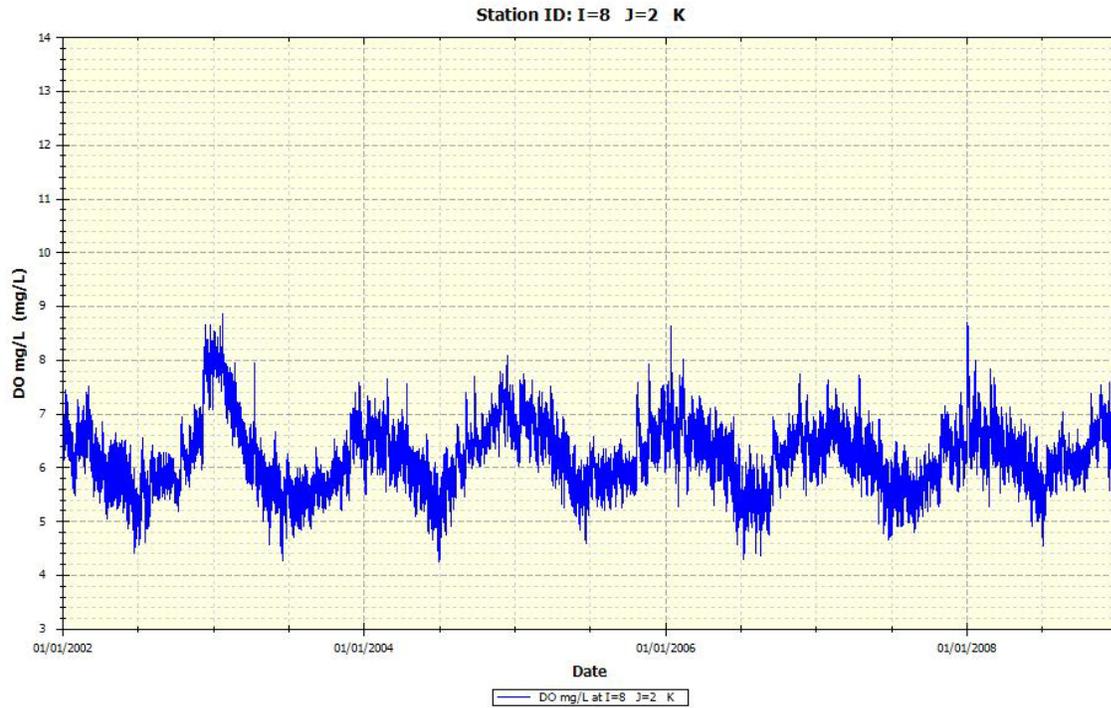


Figure 7.13 Natural condition scenario dissolved oxygen (mg/L) in WBID 1556

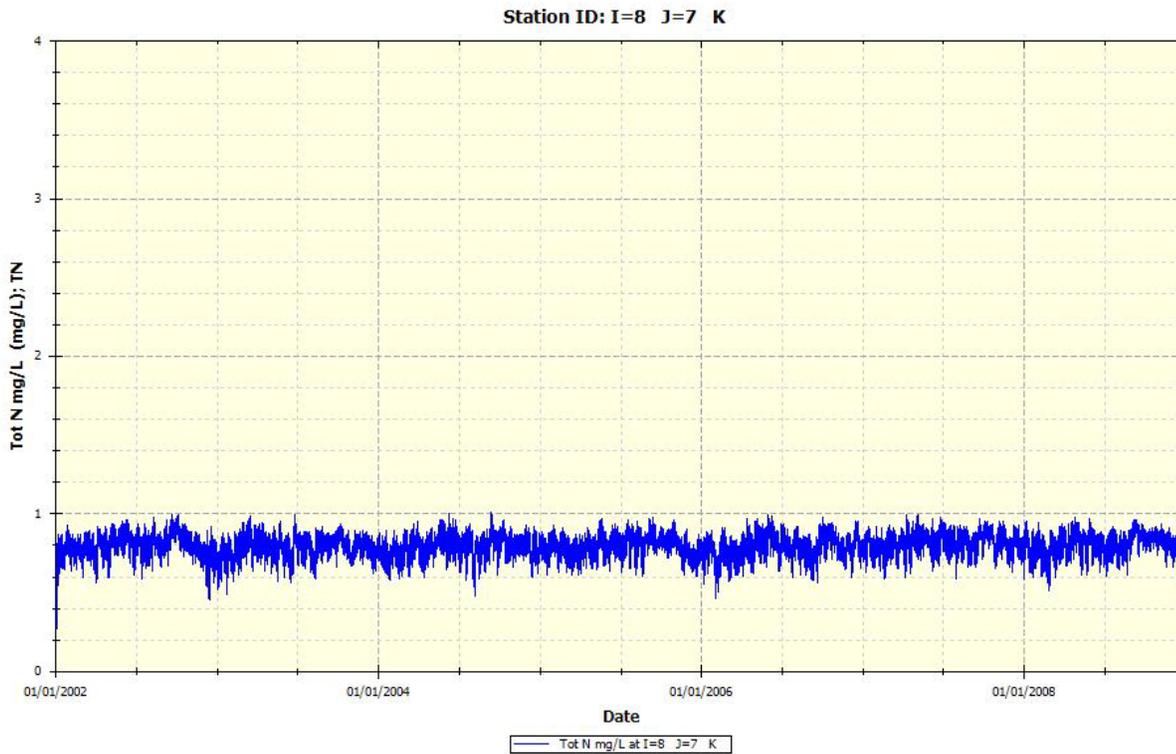


Figure 7.14 Natural condition scenario total nitrogen (mg/L) in WBID 1535

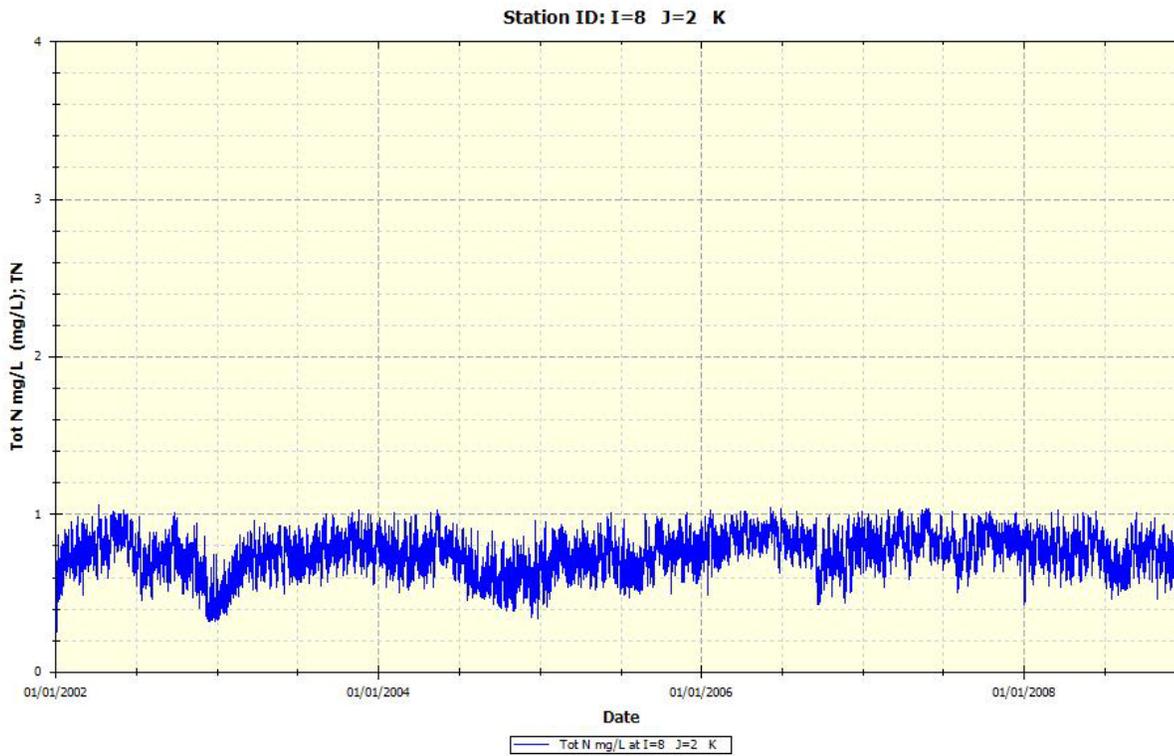


Figure 7.15 Natural condition scenario total nitrogen (mg/L) in WBID 1556

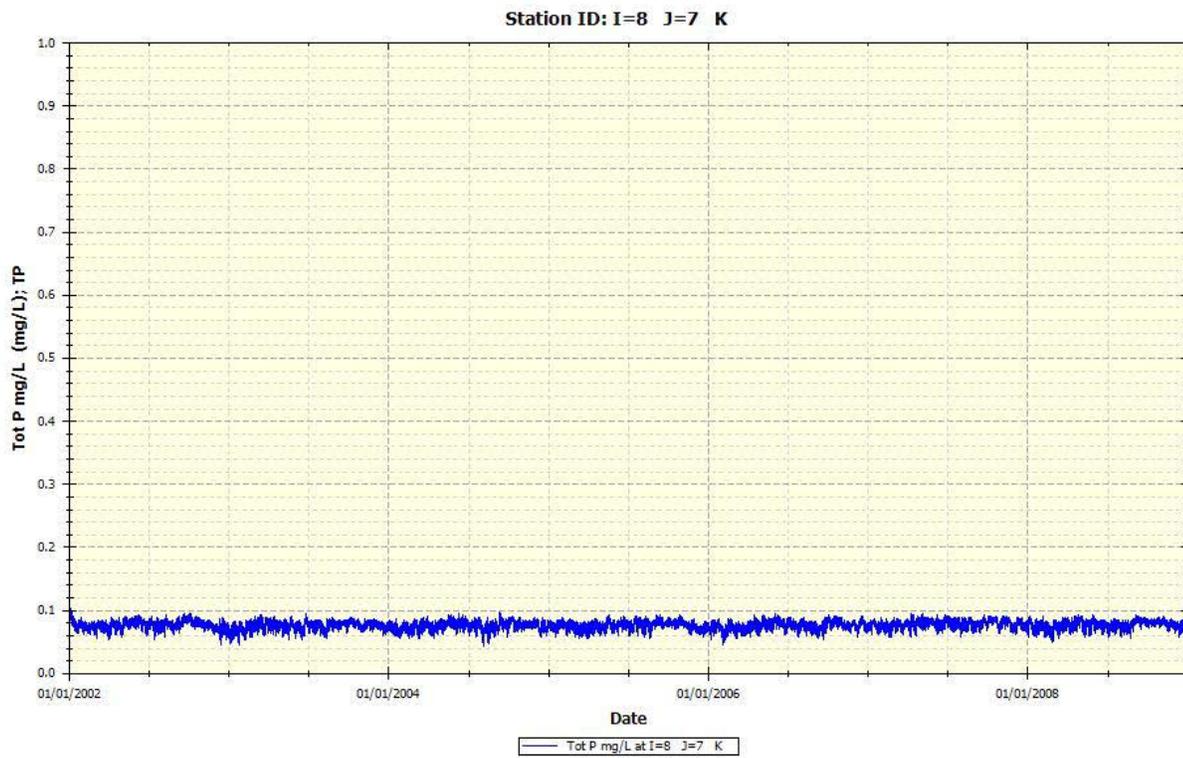


Figure 7.16 Natural condition scenario total phosphorus (mg/L) in WBID 1535

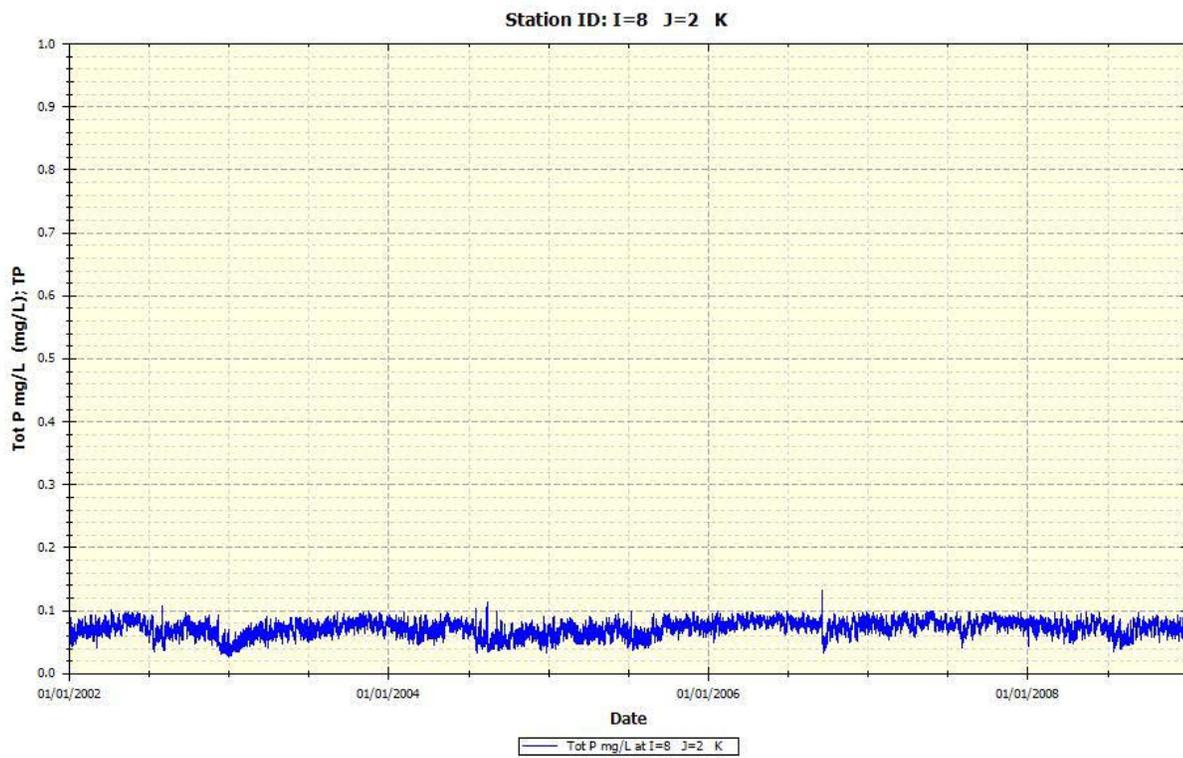


Figure 7.17 Natural condition scenario total phosphorus (mg/L) in WBID 1556

Table 7.3 Natural condition concentrations in WBIDs 1535 and 1556.

Parameter	WBID 1535	WBID 1556
Total nitrogen (mg/L)	0.80	0.74
Total phosphorus (mg/L)	0.08	0.07
BOD (mg/L)	2.10	2.19
DO (mg/L)	6.46	6.24

Table 7.4 Natural condition loadings in WBIDs 1535 and 1556.

Parameter	WBID 1535		WBID 1556	
	WLA (kg/yr)	LA (kg/yr)	WLA (kg/yr)	LA (kg/yr)
Total nitrogen (mg/L)	--	199	--	568
Total phosphorus (mg/L)	--	19	--	54
BOD (mg/L)	--	1,271	--	3,529

## 8.0 TMDL DETERMINATION

The TMDL for a given pollutant and waterbody is comprised of the sum of individual wasteload allocations (WLAs) for point sources, and load allocations (LAs) for both nonpoint sources and natural background levels. In addition, the TMDL must include a margin of safety (MOS), either implicitly or explicitly, to account for the uncertainty in the relationship between pollutant loads and the quality of the receiving waterbody. Conceptually, this definition is represented by the equation:

$$\text{TMDL} = \sum \text{WLAs} + \sum \text{LAs} + \text{MOS}$$

The TMDL is the total amount of pollutant that can be assimilated by the receiving waterbody and still achieve water quality standards and the waterbody's designated use. In this TMDL development, allowable concentrations from all pollutant sources that cumulatively amount to no more than the TMDL must be set and thereby provide the basis to establish water quality-based controls. These TMDLs are expressed as annual geometric mean concentrations, since the approach used to determine the TMDL targets relied on geometric means. The TMDLs targets were determined to be the conditions needed to restore and maintain a balanced aquatic system.

Furthermore, it is important to consider nutrient loading over time, since nutrients can accumulate in waterbodies.

The TMDL was determined for the concentrations coming from the upstream watersheds that directly drain into the listed WBID. During the development of this TMDL, it was determined that the natural condition scenario (removal of all anthropogenic sources and landuses) did not meet the Florida standards for DO. In order to prevent additional degradation in the watershed, the natural condition loadings were used to determine the TMDL, in accordance with the Natural Conditions narrative rule. The allocations for the WBID for total nitrogen, total phosphorus, and biochemical oxygen demand are presented in Table 8.1 and 8.2.

Table 8.1 TMDL load allocations for WBID 1535

<b>Constituent</b>	<b>Current Condition WLA (kg/yr)</b>	<b>Current Condition LA (kg/yr)</b>	<b>TMDL Condition WLA (kg/yr)</b>	<b>TMDL Condition LA (kg/yr)</b>	<b>Percent reduction WLA</b>	<b>Percent Reduction LA</b>
<b>Total Nitrogen</b>	--	1,090	--	199	--	82%
<b>Total Phosphorus</b>	--	139	--	19	--	87%
<b>Biochemical Oxygen Demand</b>	--	3,158	--	1,271	--	60%

Table 8.2 TMDL load allocations for WBID 1556

Constituent	Current Condition WLA (kg/yr)	Current Condition LA (kg/yr)	TMDL Condition WLA (kg/yr)	TMDL Condition LA (kg/yr)	Percent reduction WLA	Percent Reduction LA
Total Nitrogen	--	3,056	--	568	--	81%
Total Phosphorus	--	389	--	54	--	86%
Biochemical Oxygen Demand	--	8,360	--	3,529	--	58%

### 8.1 Critical Conditions and Seasonal Variation

EPA regulations at 40 CFR 130.7(c)(1) require TMDLs to take into account critical conditions for stream flow, loading, and water quality parameters. The critical condition is the combination of environmental factors creating the "worst case" scenario of water quality conditions in the waterbody. By achieving the water quality standards at critical conditions, it is expected that water quality standards should be achieved during all other times. Seasonal variation must also be considered to ensure that water quality standards will be met during all seasons of the year, and that the TMDLs account for any seasonal change in flow or pollutant discharges, and any applicable water quality criteria or designated uses (such as swimming) that are expressed on a seasonal basis.

The critical condition for nonpoint source concentration and wet weather point source concentrations is typically an extended dry period followed by a rainfall runoff event. During the dry weather period, nutrients build up on the land surface, and are washed off by rainfall. The critical condition for continuous point source concentrations typically occurs during periods of low stream flow when dilution is minimized. Although loading of nonpoint source pollutants contributing to a nutrient impairment may occur during a runoff event, the expression of that nutrient impairment is more likely to occur during warmer months, and at times when the waterbody is poorly flushed.

### 8.2 Margin of Safety

The Margin of Safety accounts for uncertainty in the relationship between a pollutant load and the resultant condition of the waterbody. There are two methods for incorporating an MOS into TMDLs (USEPA 1991):

- Implicitly incorporate the MOS using conservative model assumptions to develop allocations
- Explicitly specify a portion of the total TMDL as the MOS and use the remainder for Allocations

This TMDL uses an implicit MOS because the TMDL targets for nutrients were set to natural background conditions.

### **8.3 Waste Load Allocations**

Only MS4s and NPDES facilities discharging directly into lake segments (or upstream tributaries of those segments) are assigned a WLA. The WLAs, if applicable, are expressed separately for continuous discharge facilities (e.g., WWTPs) and MS4 areas, as the former discharges during all weather conditions whereas the later discharges in response to storm events.

#### **8.3.1 Wastewater/Industrial Permitted Facilities**

A TMDL wasteload allocation (WLA) is given to wastewater and industrial NPDES-permitted facilities discharging to surface waters within an impaired watershed. There are no NPDES permitted facilities discharging directly to the WBIDs, and no WLA was calculated.

#### **8.3.2 Municipal Separate Storm Sewer System Permits**

The WLA for MS4s are expressed in terms of percent reductions equivalent to the reductions required for nonpoint sources. Given the available data, it is not possible to estimate concentrations coming exclusively from the MS4 areas. Although the aggregate concentration allocations for stormwater discharges are expressed in numeric form, i.e., percent reduction, based on the information available today, it is infeasible to calculate numeric WLAs for individual stormwater outfalls because discharges from these sources can be highly intermittent, are usually characterized by very high flows occurring over relatively short time intervals, and carry a variety of pollutants whose nature and extent varies according to geography and local land use. For example, municipal sources such as those covered by this TMDL often include numerous individual outfalls spread over large areas. Water quality impacts, in turn, also depend on a wide range of factors, including the magnitude and duration of rainfall events, the time period between events, soil conditions, fraction of land that is impervious to rainfall, other land use activities, and the ratio of stormwater discharge to receiving water flow.

This TMDL assumes for the reasons stated above that it is infeasible to calculate numeric water quality-based effluent limitations for stormwater discharges. Therefore, in the absence of information presented to the permitting authority showing otherwise, this TMDL assumes that water quality-based effluent limitations for stormwater sources of nutrients derived from this TMDL can be expressed in narrative form (e.g., as best management practices), provided that: (1) the permitting authority explains in the permit fact sheet the reasons it expects the chosen BMPs to achieve the aggregate wasteload allocation for these stormwater discharges; and (2) the state will perform ambient water quality monitoring for nutrients for the purpose of determining whether the BMPs in fact are achieving such aggregate wasteload allocation.

All Phase 1 MS4 permits issued in Florida include a re-opener clause allowing permit revisions for implementing TMDLs once they are formally adopted by rule. Florida may designate an area as a regulated Phase II MS4 in accordance with Rule 62-620.800, FAC. Florida's Phase II MS4 Generic Permit has a "self-implementing" provision that requires MS4 permittees to update their stormwater management program as needed to meet their TMDL allocations once those TMDLs are adopted. Permitted MS4s will be responsible for reducing only the loads associated with stormwater outfalls which it owns, manages, or otherwise has responsible control. MS4s are not responsible for reducing other nonpoint source loads within its jurisdiction. All future MS4s permitted in the area are automatically prescribed a WLA equivalent to the percent reduction assigned to the LA. The

MS4 service areas described in Section 6.1.2 of this report are required to meet the percent reduction prescribed in Table 8.1 and 8.2 through the implementation of BMPs.

#### **8.4 Load Allocations**

The load allocation for nonpoint sources was assigned a percent reduction in nutrient concentrations from the current concentrations coming into each of the WBIDs addressed in the TMDL report.

### **9.0 RECOMMENDATIONS/IMPLEMENTATION**

The initial step in implementing a TMDL is to more specifically locate pollutant source(s) in the watershed. FDEP employs the Basin Management Action Plan (B-MAP) as the mechanism for developing strategies to accomplish the specified load reductions. Components of a B-MAP are:

- Allocations among stakeholders
- Listing of specific activities to achieve reductions
- Project initiation and completion timeliness
- Identification of funding opportunities
- Agreements
- Local ordinances
- Local water quality standards and permits
- Follow-up monitoring

## 10.0 REFERENCES

- Ambrose, RB, TA Wool, JP Connolly and RW Schanz. 1988. WASP4, A Hydrodynamic and Water Quality Model – Model Theory, User’s Manual and Programmer’s Guide. U.S. Environmental Protection Agency, Athens, GA. EPA/600/3-87-039.
- Di Toro, D.M., J.J. Fitzpatrick, and R.V. Thomann. 1983. Documentation for water quality analysis simulation program (WASP) and model verification program (MVP) No. EPA-600-3-81-044). U.S. EPA U.S Government Printing Office, Washington,. DC.
- Florida Administrative Code. Chapter 62-40, Water Resource Implementation Rule.
- Florida Administrative Code. Chapter 62-302, Surface Water Quality Standards.
- Florida Administrative Code. Chapter 62-303, Identification of Impaired Surface Waters.
- Florida Department of Health (FDOH), 2009, Onsite Sewage Treatment and Disposal Systems Statistical Data, Bureau of Onsite Sewage Programs.  
<http://www.doh.state.fl.us/environment/ostds/statistics/ostdsstatistics.htm>
- Florida Department of Environmental Protection (FDEP). No date. *Learn About Your Watershed: Springs Coast Watershed*. <[http://www.protectingourwater.org/watersheds/map/springs\\_coast/](http://www.protectingourwater.org/watersheds/map/springs_coast/)> Accessed January, 2012.
- Florida Department of Environmental Protection (FDEP). 2006. *Water Quality Status Report*. Florida Department of Environmental Protection. <<http://waterwebprod.dep.state.fl.us/basin411/springscoast/status/SpringCst.pdf>>. Accessed January, 2012.
- Florida Department of Environmental Protection (FDEP). 2008. *Water Quality Assessment Report*. Florida Department of Environmental Protection. <<http://waterwebprod.dep.state.fl.us/basin411/springscoast/status/SpringCst.pdf>>. Accessed January, 2012.
- Hamrick, J. M., 1992: A Three-Dimensional Environmental Fluid Dynamics Computer Code: Theoretical and Computational Aspects. The College of William and Mary, Virginia Institute of Marine Science. Special Report 317, 63 pp.
- National Oceanic and Atmospheric Administration (NOAA). No Date. *Climate Normals for East Central Florida*. National Weather Service, National Oceanic and Atmospheric Administration. <[http://www.srh.noaa.gov/mlb/?n=climate\\_normals\\_comparison](http://www.srh.noaa.gov/mlb/?n=climate_normals_comparison)>. Accessed January, 2012.
- Southwest Florida Water Management District (SWFWMD). 2001. *Springs Coast Comprehensive Watershed Management Plan*. Southwest Florida Water Management District. <<http://www.swfwmd.state.fl.us/documents/plans/cwm/cwm-springscoast.pdf>>. Accessed January, 2012.

- United States Army Corps of Engineers (USACE ) and South Florida Water Management District (SFWMD). 2010. *Central and Southern Florida Project Comprehensive Everglades Restoration Plan: Biscayne Bay Coastal Wetlands Phase 1. Draft Integrated Project Implementation Report and Environmental Impact Statement*. U.S. Army Corps of Engineers and South Florida water Managment District. <[http://www.evergladesplan.org/pm/projects/project\\_docs/pdp\\_28\\_biscayne/031910\\_dpir/031910\\_bbcw\\_dpir\\_vol\\_1\\_main\\_report.pdf](http://www.evergladesplan.org/pm/projects/project_docs/pdp_28_biscayne/031910_dpir/031910_bbcw_dpir_vol_1_main_report.pdf)>. Accessed January, 2012.
- United States Environmental Protection Agency (USEPA). 1991. *Guidance for Water Quality – Based Decisions: The TMDL Process*. U.S. Environmental Protection Agency, Office of Water, Washington, D.C. EPA-440/4-91-001, April 1991.
- United States Environmental Protection Agency (USEPA). 2012a. Technical Support Document for U.S. EPA’s Proposed Rule for Numeric Nutrient Criteria for Florida’s Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix C: Watershed Hydrology and Water Quality Modeling Report for 19 Florida Watersheds. U.S. Environmental Protection Agency, Office of Water, Washington, D.C. July 2012.
- United States Environmental Protection Agency (USEPA). 2012b. Technical Support Document for U.S. EPA’s Proposed Rule for Numeric Nutrient Criteria for Florida’s Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix C Attachment 14: The Crystal Watershed. U.S. Environmental Protection Agency, Office of Water, Washington, D.C. July 2012.
- United States Environmental Protection Agency (USEPA). 2012c. Technical Support Document for U.S. EPA’s Proposed Rule for Numeric Nutrient Criteria for Florida’s Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Appendix D: Hydrodynamic and Water Quality Modeling Report for Nutrient Criteria for 11 Florida Estuary Systems. U.S. Environmental Protection Agency, Office of Water, Washington, D.C. July 2012.
- United States Environmental Protection Agency (USEPA). 2012d. Technical Support Document for U.S. EPA’s Proposed Rule for Numeric Nutrient Criteria for Florida’s Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Estuaries, Appendix D Attachment 7: The Florida Big Bend Hydrodynamic and Water Quality Model Calibration and Validation: Tables and Figures. U.S. Environmental Protection Agency, Office of Water, Washington, D.C. July 2012.
- United States Environmental Protection Agency (USEPA). 2012e. Technical Support Document for U.S. EPA’s Proposed Rule for Numeric Nutrient Criteria for Florida’s Estuaries, Coastal Waters, and Southern Inland Flowing Waters - Volume 1: Estuaries, Estuaries, Appendix D Attachment 11: Tampa-Sarasota Bay Hydrodynamic and Water Quality Model Calibration and Validation: Tables and Figures. U.S. Environmental Protection Agency, Office of Water, Washington, D.C. July 2012.
- Wool, T. A., S. R. Davie, and H. N. Rodriguez, 2003: Development of three-dimensional hydrodynamic and water quality models to support TMDL decision process for the Neuse River estuary, North Carolina. J. Water Resources Planning and Management, 129, 295-306.